




# E00


## 1.00mm Pitch Box Header Dual Row Single Body Vertical SMT TYPE ( 1.00\*1.00mm)

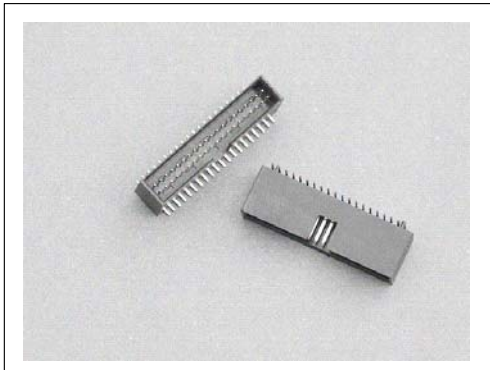

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.30x0.30mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

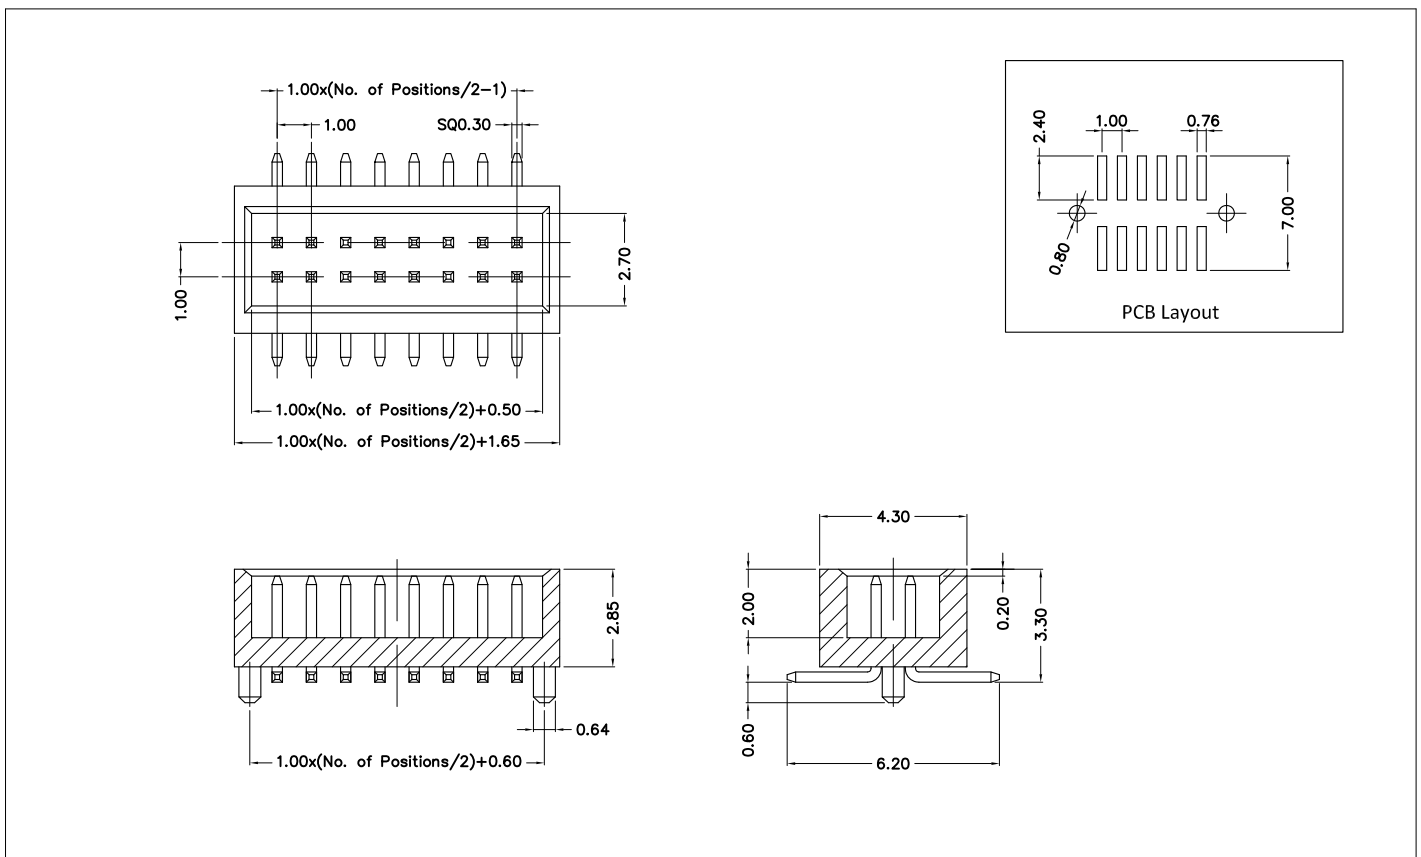

### Ordering Information: E00 - XXX - XXX - XX - X - XX

	1	2	3	4	5	6
1 --> Series Number:	E00					
2 --> Contact Positions:	8~120Pin: 008~120,					
3--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated			
4 --> CAP option:	00: Without CAP,		01: With CAP,			
5 --> Packing option:	2: Tube,		3: T&R,			
6 --> Location Peg option:	00: Without Peg,		01: With Peg,			