




E07


2.00mm Pitch Box Header Dual Row Single Body Straight & Right Angle DIP & SMT TYPE

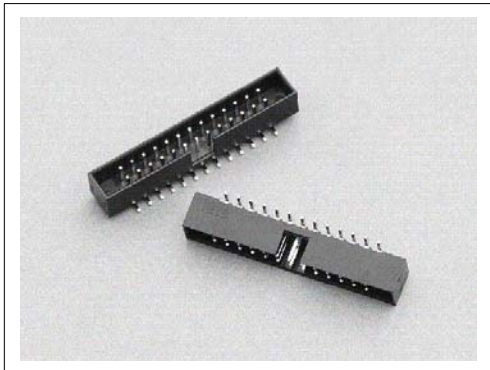

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

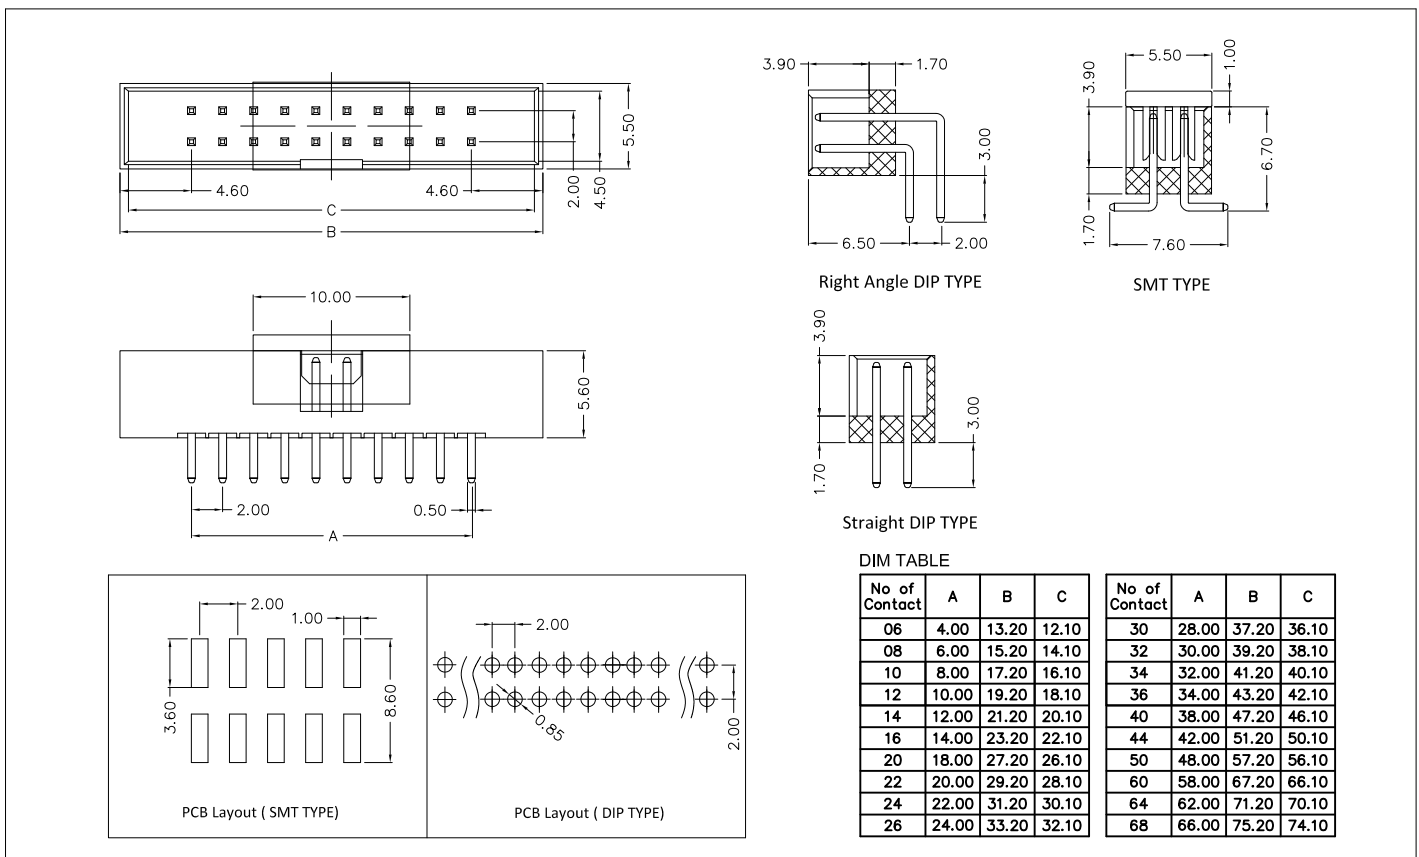

Ordering Information: E07 - XXX - XX - XXX - XX - X

1 2 3 4 5 6

1 --> Series Number:	E07		
2 --> Contact Positions:	6-68PIN: 006-068		
3 --> Connector Type:	10: Straight DIP Type,	11: Right Angle DIP Type,	20: SMT Type,
4 --> Plating option:	100: Full Gold Flash Plated, 610: 10U" selective Gold plated, 620: 20U" selective Gold plated,	500: Tin Plated, 615: 15U" selective Gold plated 630: 30U" selective Gold plated	600: Selective Gold Flash Plated
5 --> CAP option: (For SMT Type only)	00: Without CAP,	01: With CAP,	
6 --> Packing option:	1: Tray,	2: Tube,	3: T&R,