





2.54mm Pitch Pin Header Single Row Dual Body Vertical SMT TYPE

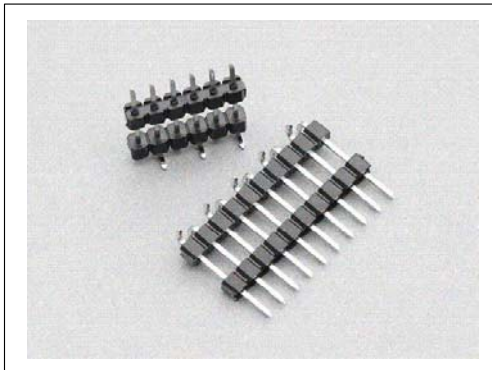

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

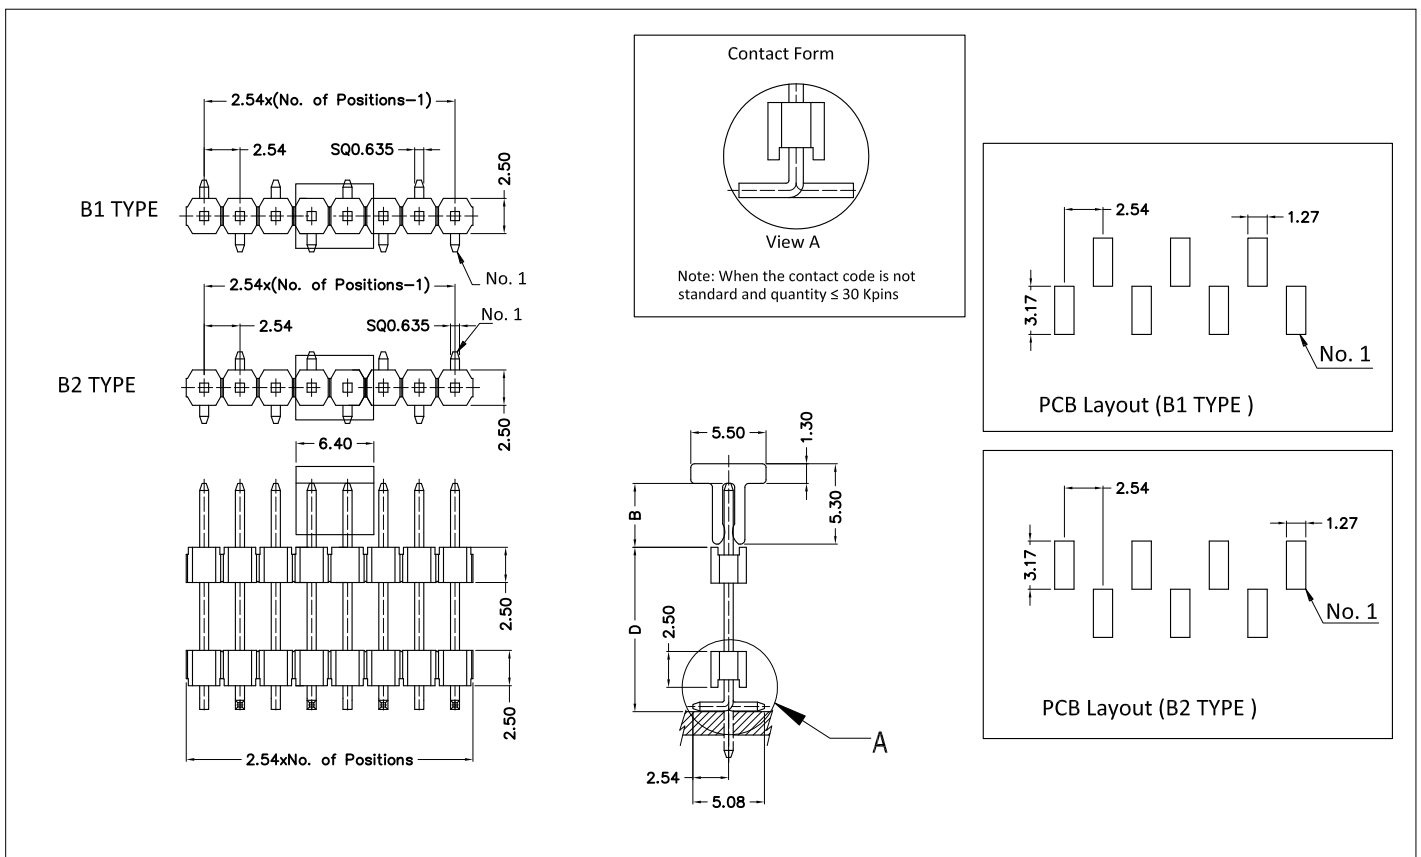

Ordering Information: E11 - XXX - XX - XX - XXX - XX - X
 1 2 3 4 5 6 7

1 --> Series Number:	E11
2 --> Contact Positions:	02-30PIN: 002-030,
3 --> Layout option:	10: B1 TYPE, 11: B2 TYPE,
4 --> Dim. option:	10: B=3.50,C=5.08, D=7.20, 11: B=4.80,C=5.08, D=7.20, 12: B=6.10,C=5.08, D=6.70, 13: B=6.90,C=5.08, D=8.90, As request: B/C/D=XX/XX/XX, For Eg: B=7.00, C=5.08, D=6.50, Code=7.00/5.08/6.50,
5--> Plating option:	100: Full Gold Flash Plated, 500: Tin Plated, 600: Selective Gold Flash Plated 610: 10U" selective Gold plated, 615: 15U" selective Gold plated 620: 20U" selective Gold plated, 630: 30U" selective Gold plated
6 --> CAP option:	00: Without CAP, 01: With CAP,
7 --> Packing option:	2: Tube, 3: T&R,