




E27


1.27mm Pitch Pin Header Dual Row Single Body Straight & Right Angle DIP & SMT TYPE (1.27*1.27mm)

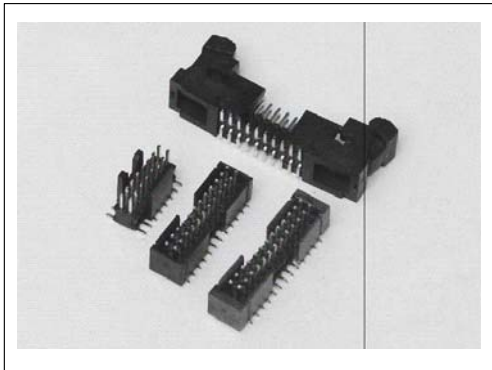

Specification:

| | |
|--------------------------|---|
| Insulator Material: | High Temperature Thermoplastic, UL94V-0. |
| Contact Material: | Copper Alloy, 0.40x0.40mm. |
| Contact Plating: | Au or Sn over Nickel. |
| Current Rating: | 1 AMP. |
| Insulator Resistance: | 500 Megohms Min. |
| Dielectric Withstanding: | 500V AC for 1 Minute. |
| Operating Temperature: | -40°C ~ +105°C. |
| Max. Processing Temp.: | 230°C for 30~60 seconds. 260°C for 10 seconds. |

RoHS Compliant

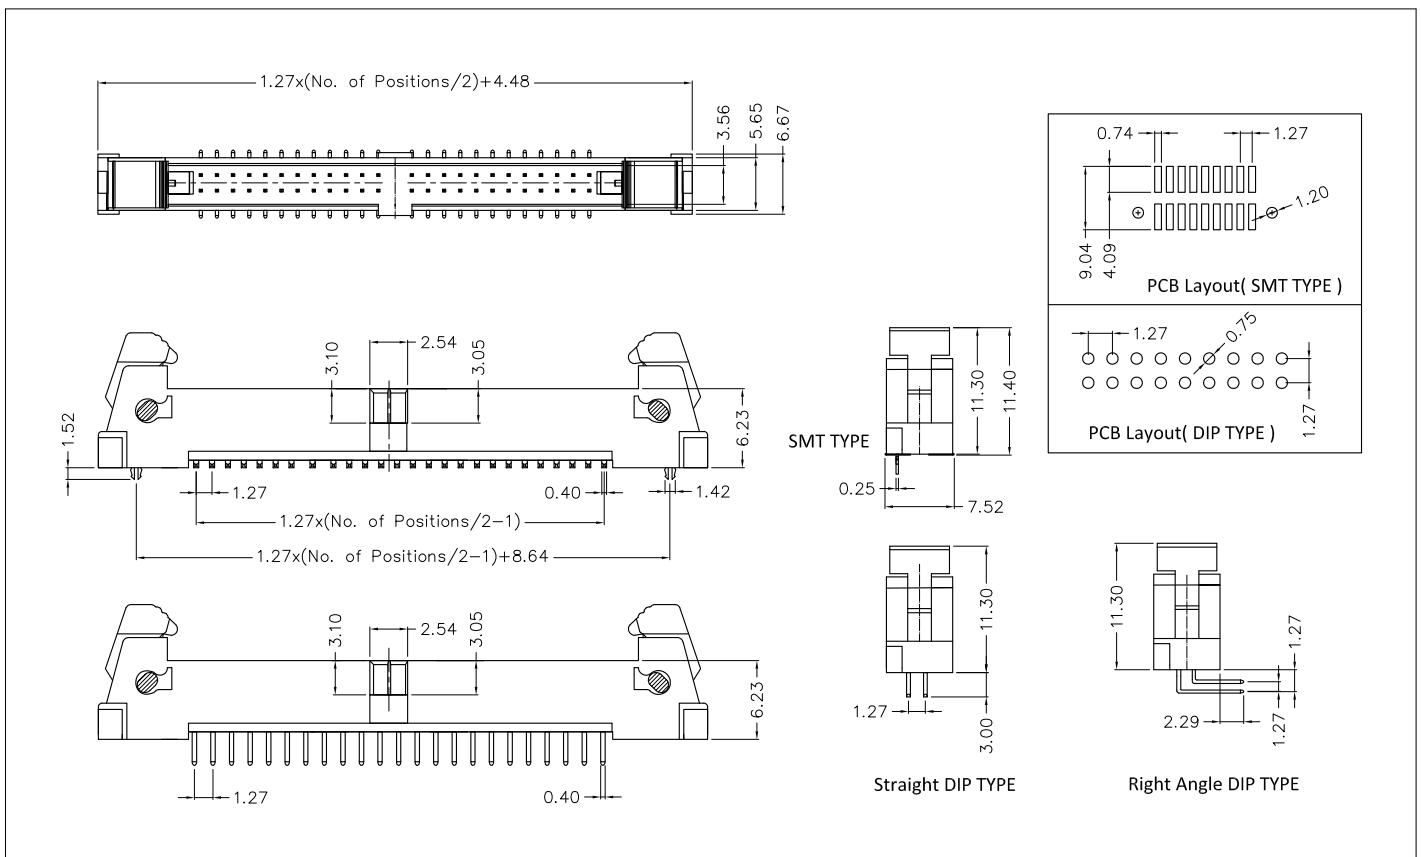

Ordering Information: E27 - XXX - XX - XXX - XX - X - XX

1 2 3 4 5 6 7

| | |
|--------------------------|--|
| 1 --> Series Number: | E27 |
| 2 --> Contact positions: | 010, 012, 014, 020, 026, 030, 040, 050, 064, |
| 3 --> Connector Type: | 10: Straight DIP TYPE, 11: Right Angle DIP TYPE, 20: SMT TYPE, |
| 4 --> Plating option: | 100: Full Gold Flash Plated, 500: Tin Plated, 600: Selective Gold Flash Plated 610: 10U" selective Gold plated, 615: 15U" selective Gold plated 620: 20U" selective Gold plated, 630: 30U" selective Gold plated |
| 5 --> CAP option: | 00: Without CAP, 01: With CAP, |
| 6 --> Packing option: | 2: Tube, 3: T&R, |
| 7 --> Lock option: | 00: Without Lock, 01: With Lock, |