




E30


1.27mm Pitch Box Header Dual Row Single Body Straight & Right Angle DIP & SMT TYPE (1.27*1.27mm)

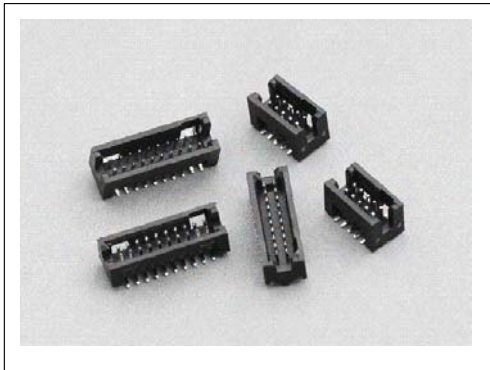

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

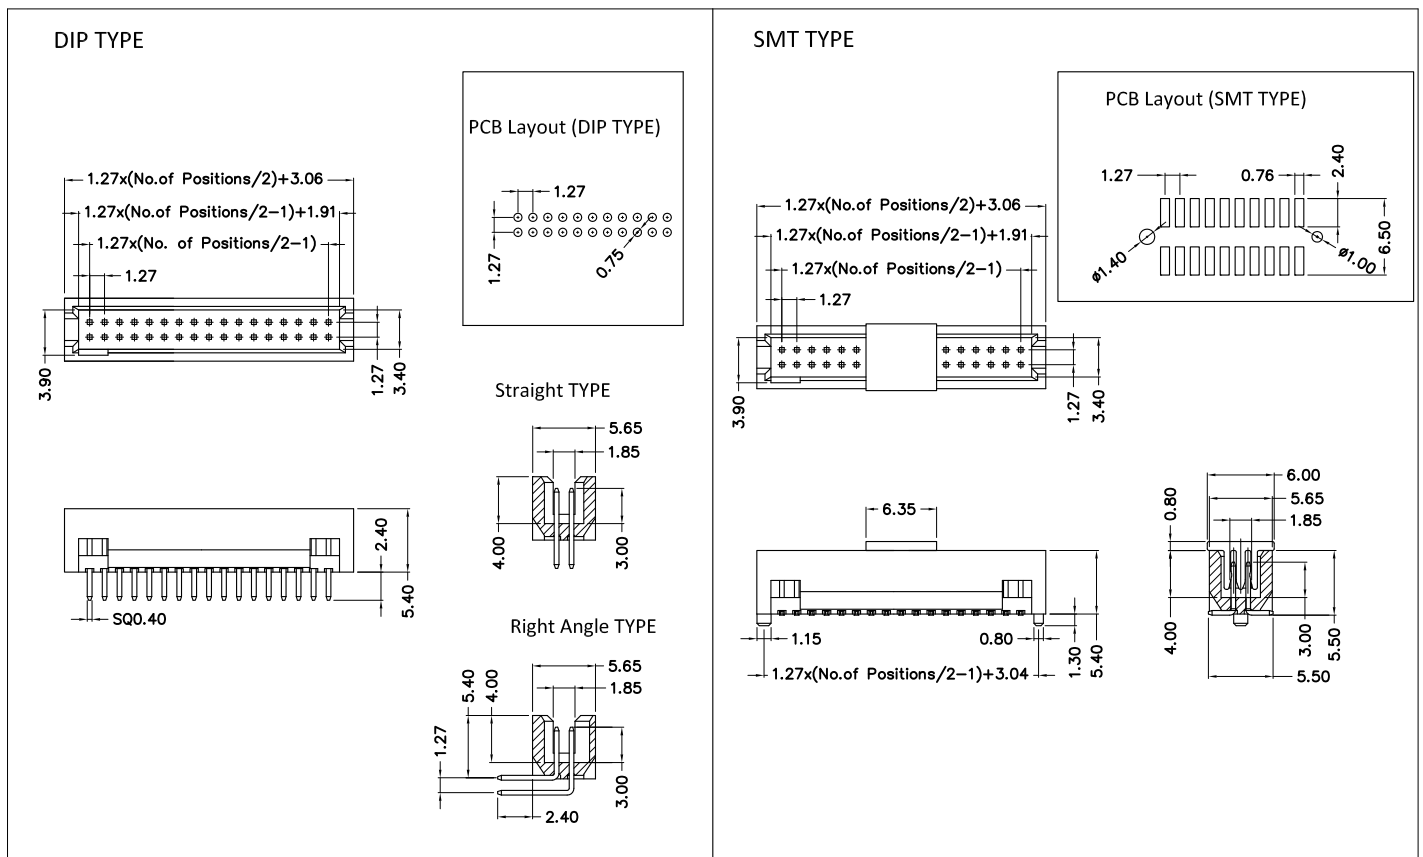

Ordering Information: E30 - XXX - XX - XXX - X - XX - XX

1 2 3 4 5 6 7

1 --> Series Number:	E30		
2 --> Contact Positions:	10~100Pin: 010~100,		
3 --> Connector Type:	10: Straight DIP TYPE,	11: Right Angle DIP TYPE,	20: SMT TYPE
4 --> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	
5 --> Packing option:	2: Tube,	3: T&R,	
6 --> CAP option: (For SMT TYPE only)	00: Without CAP,	01: With CAP,	
7 --> Location Peg option: (For SMT TYPE only)	00: Without Peg,	01: With Peg,	