




# E34


## 2.00mm Pitch Pin Header Single & Dual & Triple & Four Row Dual Body Straight DIP TYPE

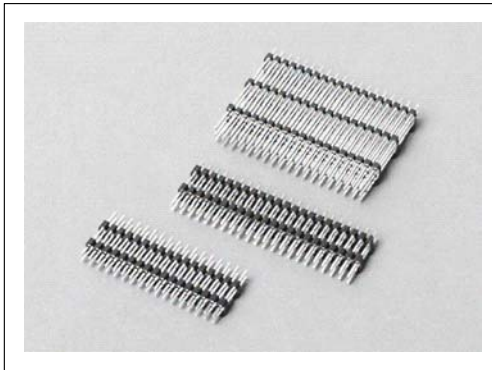

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

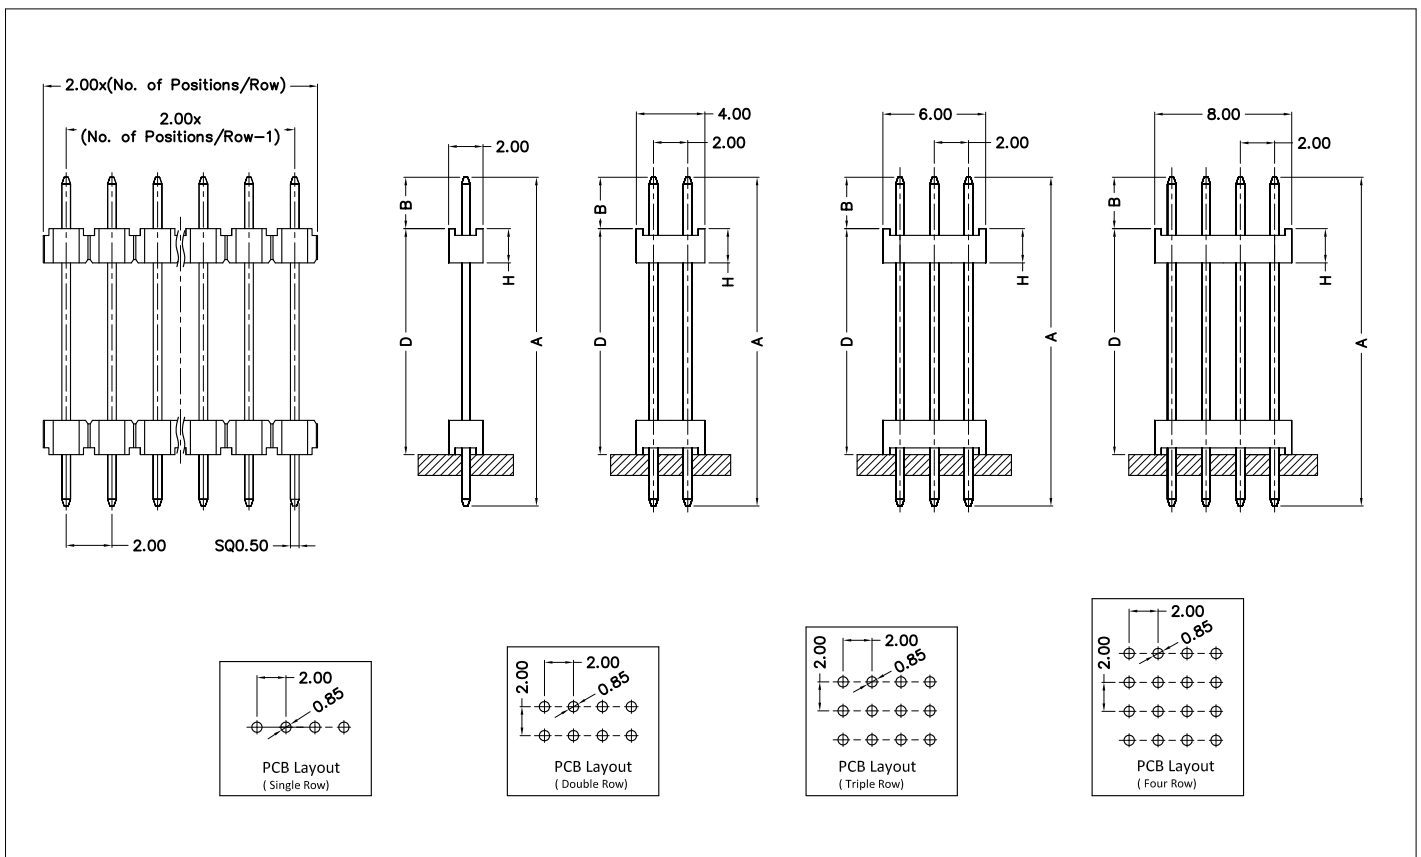

### Ordering Information: E34 - XXX - XX - XX - XX - XX/XX - XXX

1 2 3 4 5 6 7

1 --> Series Number:	E34			
2 --> Contact Positions:	Single Row: 040 Max,	Dual Row: 080 Max,	Triple Row: 120 Max,	Four Row: 160 Max,
3 --> Contact Row:	10: Single Row,	20: Double Row,	30: Triple Row,	40: Four Row,
4 --> Profile option:	10: H=1.50,	11: H=2.00,	Note: Triple & Four Row only for 1.50mm,	
5 --> Stacks height option:	As request: D=XX,	For Eg: D=6.35,	Code=6.35,	D=7.00, Code=7.00,
6 --> Dim. " A, B " option:	As request: A/B=XX/XX,	For Eg: A=11.50, B=7.60,	Code=11.50/7.60,	
7 --> Plating option:	100: Full Gold Flash Plated, 500: Tin Plated, 600: Selective Gold Flash Plated			
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated	