




# E39


## 2.00mm Pitch Pin Header Single Row Single Body Horizontal SMT TYPE

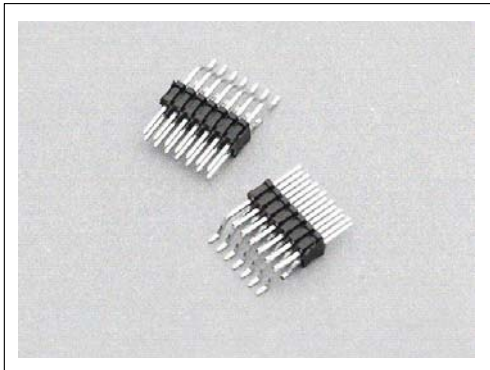

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

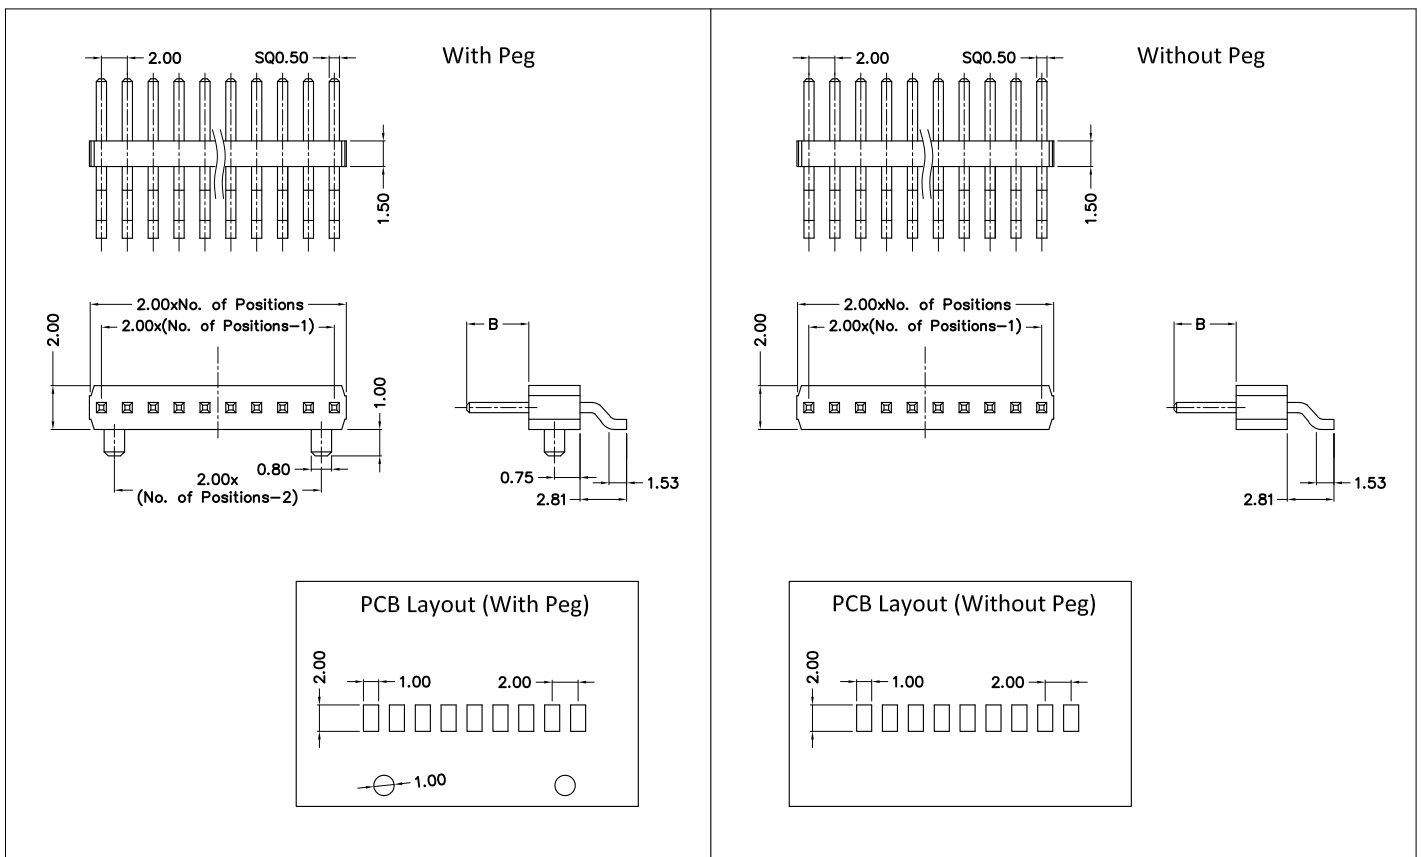

**Ordering Information:** E39 - XXX - XX - XXX - XX - X - XX  
 1      2      3      4      5      6      7

1 --> Series Number:	E39					
2 --> Contact Positions:	4~36 Pin: 004~036,					
3 --> Dim. "B" option:	10: B=3.20,	11: B=4.00,	12: B=4.45,	As request: A=XX,		For Eg: B=2.80, Code=2.80,
4--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated			
5 --> CAP option:	00: Without CAP,		01: With CAP,			
6 --> Packing option:	2: Tube,		3: T&R,			
7 --> Location Peg option:	00: Without Peg,		01: With Peg,			