




E46


2.54mm Pitch Pin Header Triple Row Single & Dual Body Straight DIP TYPE

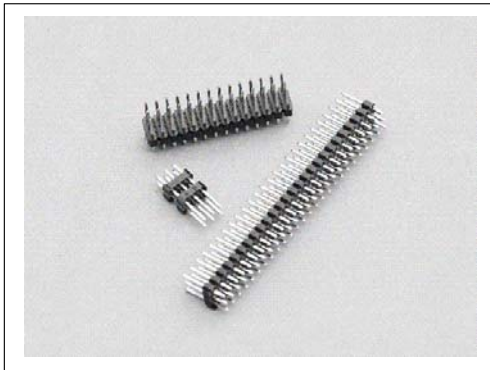

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

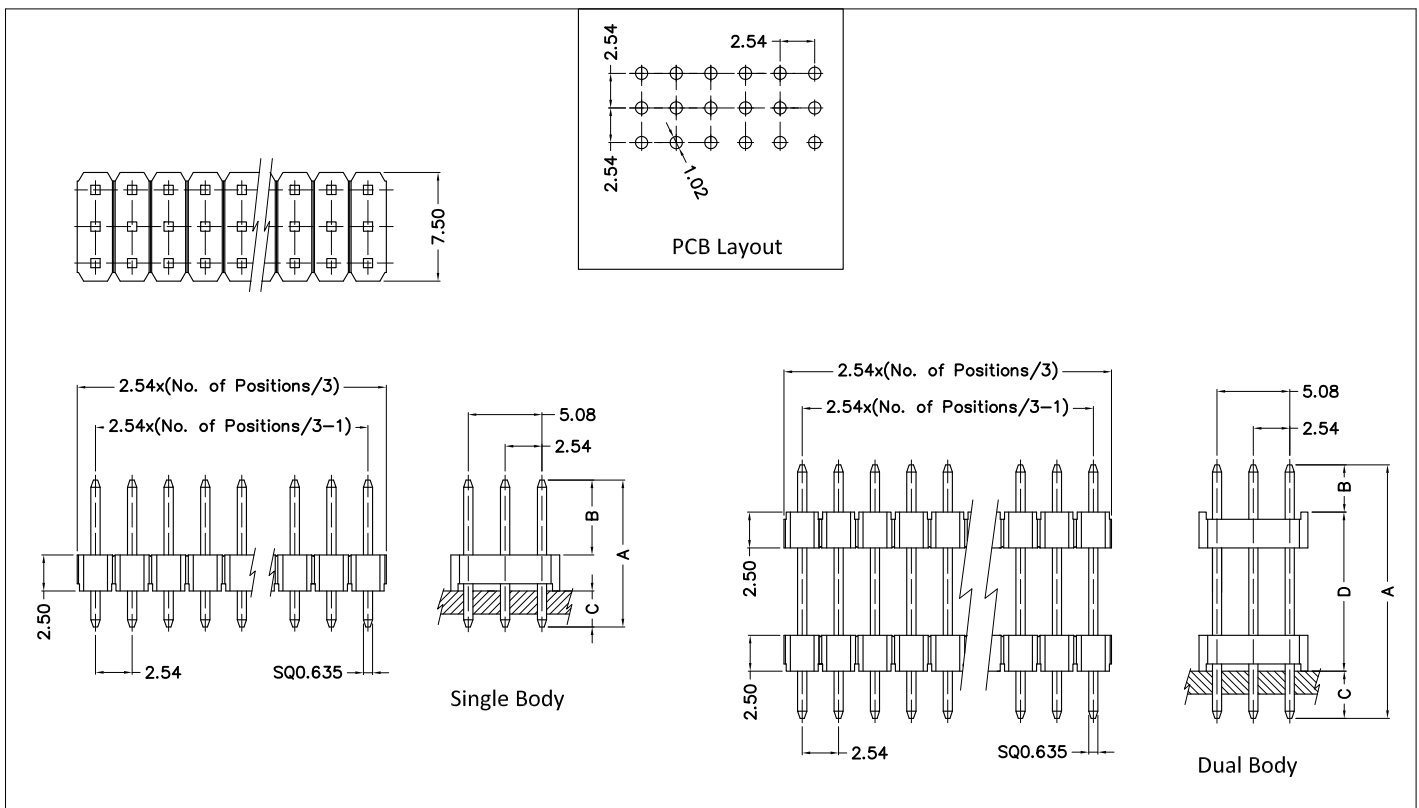

Ordering Information: E46 - XXX - XX - XX - XXX

1 --> Series Number:	E46				
2 --> Contact Positions:	6-120PIN: 006-120,				
3 --> Body Type:	10: Single Body,		20: Dual Body,		
4 --> Dimension option:	For Single Body: 10: A=10.20, B=5.20, C=2.50, 11: A=10.80, B=5.80, C=2.50, 12: A=11.30, B=5.50, C=3.30, 13: A=12.60, B=6.80, C=3.30, 14: A=14.00, B=6.20, C=3.30, 15: A=14.80, B=9.00, C=3.30, 16: A=17.90, B=12.10, C=3.30, 17: A=19.80, B=14.00, C=3.30, 18: A=21.60, B=15.80, C=3.30, 19: A=22.80, B=17.00, C=3.30, 20: A=24.90, B=19.10, C=3.30, 21: A=14.50, B=8.50, C=3.10, As request: A/B/C=XX/XX/XX, For Eg: A=11.00, B=5.20, C=2.50, Code=11.00/5.20/2.50, For Dual Body: 10: A=17.70, B=5.70, C=3.30, D=8.70, 11: A=19.80, B=5.70, C=3.30, D=10.80, 12: A=21.60, B=5.70, C=3.30, D=12.60, 13: A=22.80, B=5.70, C=3.30, D=13.80, 14: A=24.90, B=5.70, C=3.30, D=15.90, 15: A=26.70, B=5.70, C=3.30, D=17.70, 16: A=29.00, B=5.70, C=3.30, D=20.00, 17: A=30.80, B=5.70, C=3.30, D=21.80, As request: A/B/C/D=XX/XX/XX/XX, For Eg: A=19.00, B=5.70, C=3.30, D=8.70, Code=19.00/5.70/3.30/8.70,				
5--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated		
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated		