




E51


2.54mm Pitch Pin Header Single & Dual Row Single Body Right Angle DIP TYPE (Reverse Up -Right)

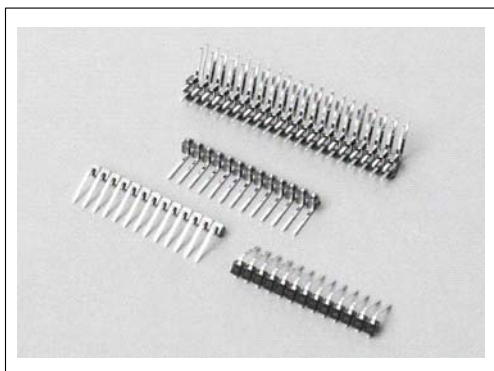

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

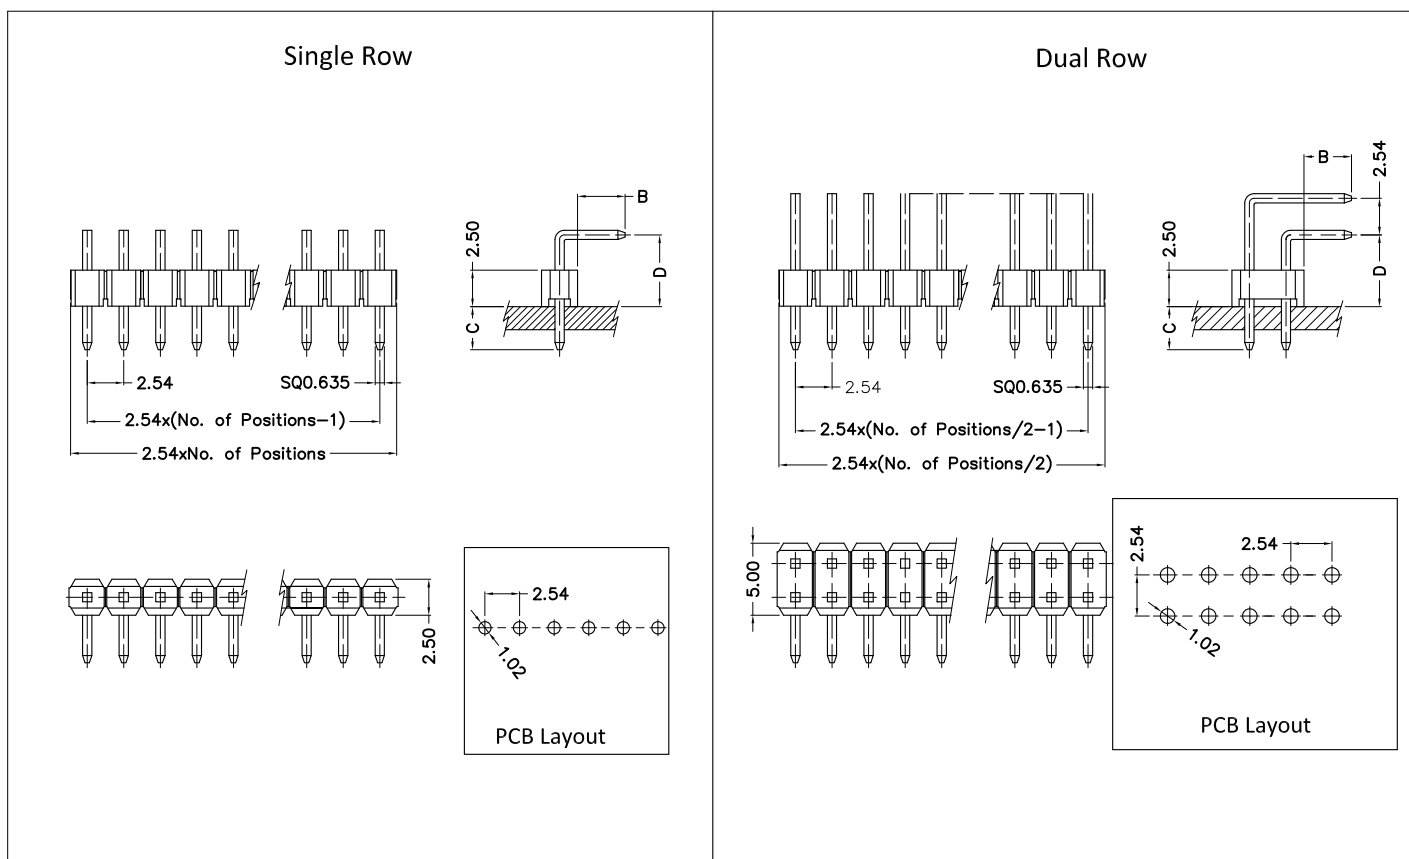

Ordering Information: E51 - XXX - XX - XX - XX - XXX

1 2 3 4 5 6

1 --> Series Number:	E51					
2 --> Contact Positions:	Single Row: 001-050,		Dual Row: 004-100,			
3 --> Contact Row:	10: Single Row,		20: Dual Row,			
4 --> Dim. " D " option:	10: D=3.90,	11: D=4.10,	As request: D=XX,	For Eg: D=4.00,	Code=4.00,	
5 --> Dim. " B, C " option:	10: B=3.50, C=3.30,	11: B=4.80, C=3.30,	12: B=6.10, C=3.30,	13: B=6.90, C=3.30,	14: B=9.90, C=3.30,	
	15: B=12.00, C=3.30,	16: B=13.80, C=3.30,	17: B=15.00, C=3.30,	18: B=17.10, C=3.30,		
	As request: B/C=XX/XX,		For Eg: B=6.50, C=3.00, Code=6.50/3.00,			
6--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated			