




E52


2.54mm Pitch Pin Header Triple Row Single & Dual Body Right Angle DIP TYPE

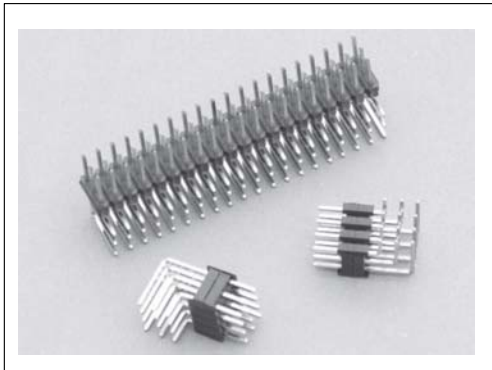

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

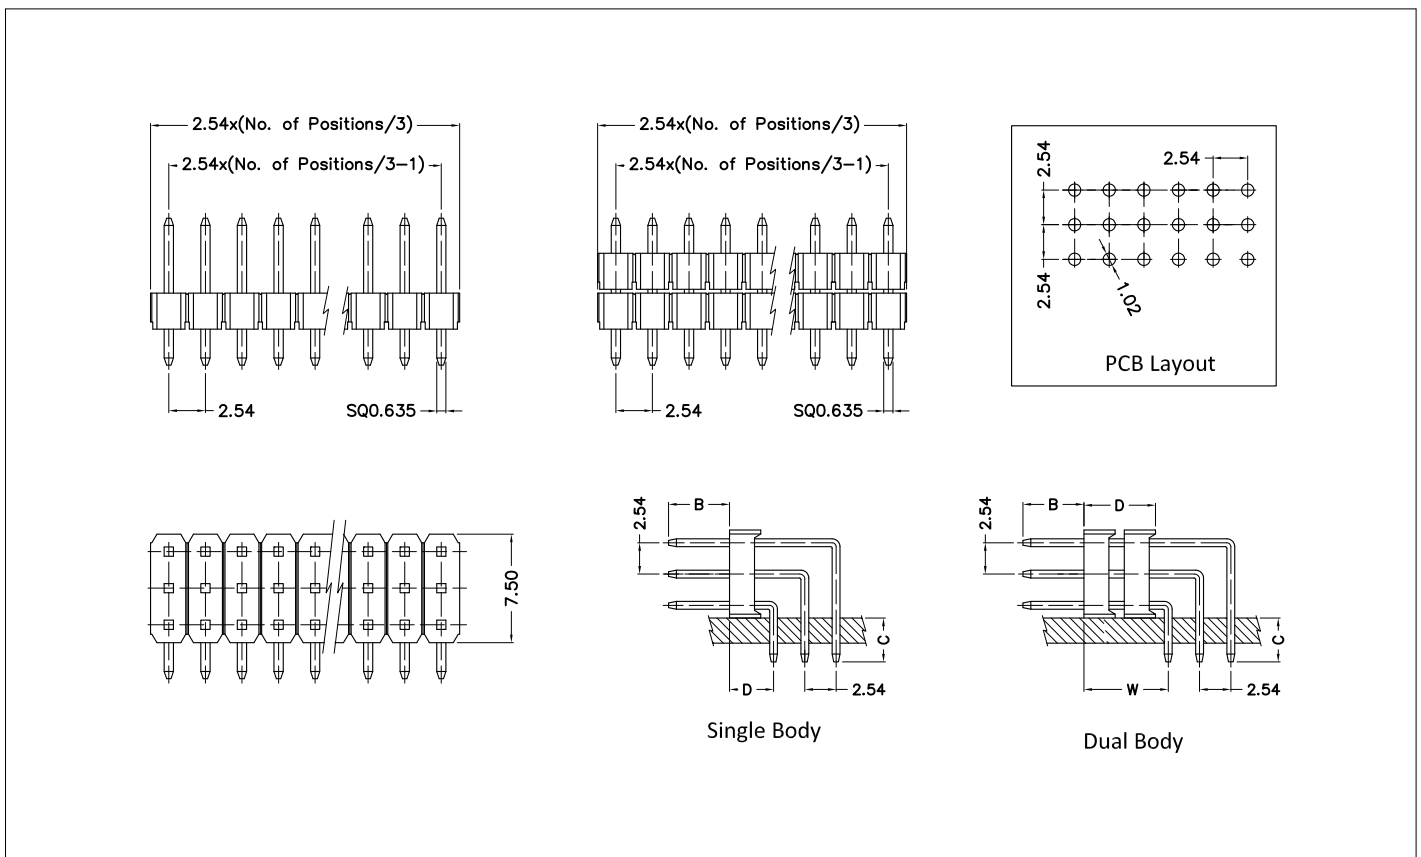

Ordering Information: E52 - XXX - XX - XX - XXX - XX

1 2 3 4 5 6

1 --> Series Number:	E52					
2 --> Contact Positions:	6-120Pin: 006-120,					
3 --> Body Type:	10: Single Body,		20: Dual Body,			
4 --> Dimensions option:	For Single Body:		10: B=6.10, C=3.30, D=3.90,			
	As request: B/C/D=XX/XX/XX, For Eg: B=3.05, C=3.30, D=4.10, Code=3.05/3.30/4.10,					
	For Dual Body:		20: B=6.10, C=3.30, D=6.50, W=3.90,			
As request: B/C/D/W=XX/XX/XX/XX, For Eg: B=3.05, C=3.30, D=6.20, W=4.10, Code=3.05/3.30/6.20/4.10,						
5--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated			
6 --> CAP option:	00: Without CAP,		01: With CAP (only for Single Body)			