




E62


2.54mm Pitch Pin Header Dual Row Single Body Horizontal & Right Angle M & D SMT TYPE (W=5.55)

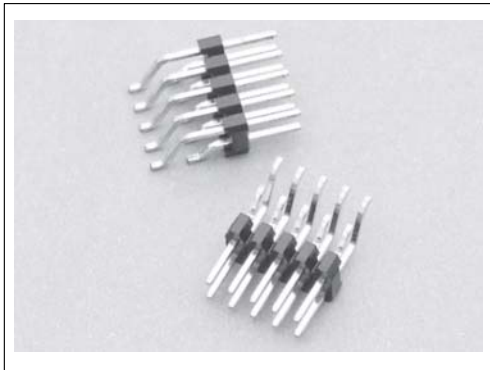

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

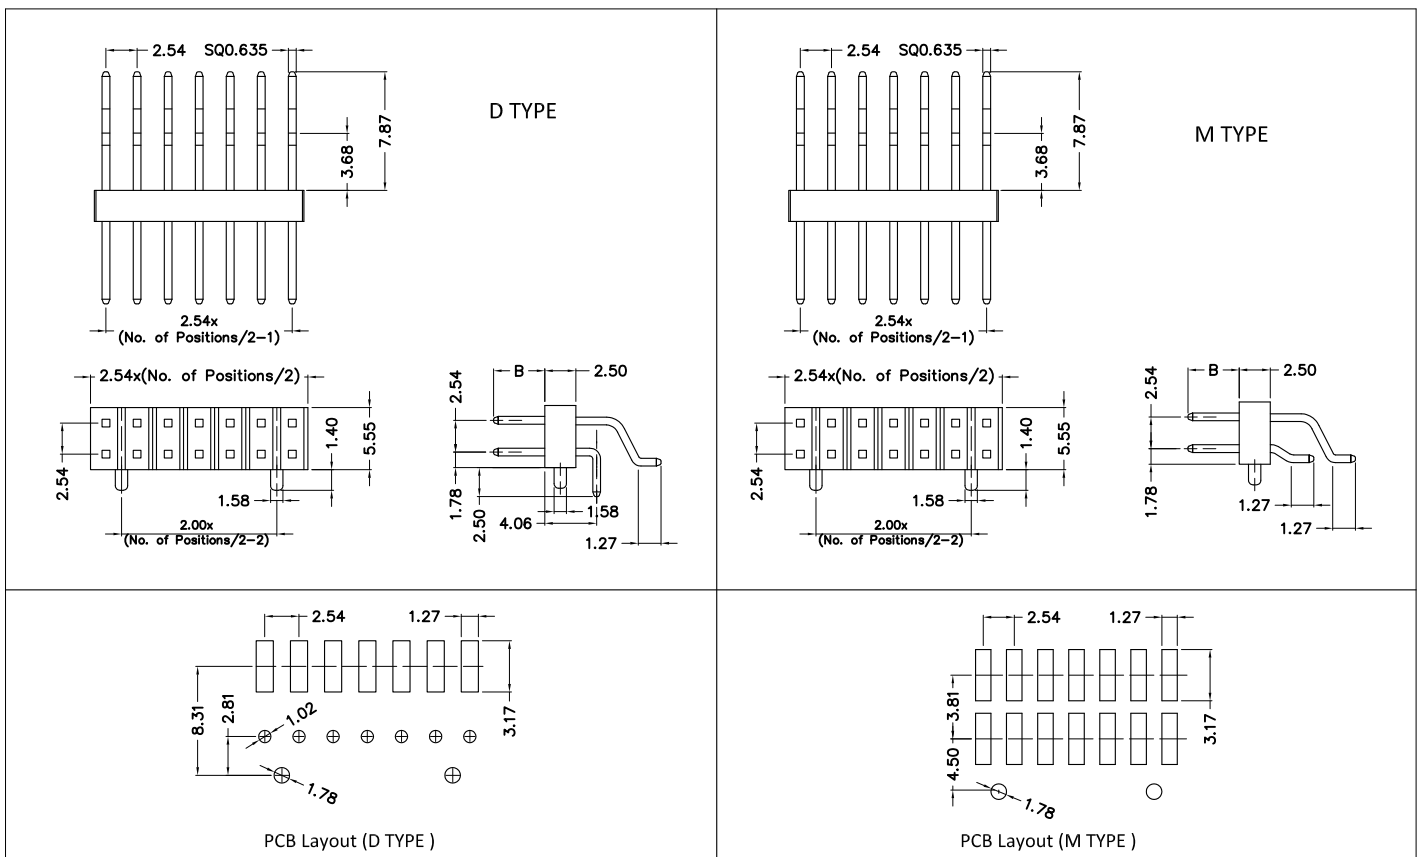

Ordering Information: E62 - XXX - XX - XX - XXX - XX - X - XX

1 --> Series Number:	E62							
2 --> Contact Positions:	4-40PIN: 004-040,							
3 --> Connector Type:	10: M TYPE,				11: D TYPE,			
4 --> Dim. "B" option:	10: B=3.05,	11: B=5.84,	12: B=8.13,	13: B=10.67,				
	As request: B=XX,		For Eg: B=4.00,		Code=4.00,			
5--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated			
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated					
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated					
6 --> CAP option:	00: Without CAP,				01: With CAP,			
7 --> Packing option:	2: Tube,				3: T&R,			
8 --> Location Peg option:	00: Without Peg,				01: With Peg,			