





2.54mm Pitch Pin Header Single Row Single Body Vertical SMT TYPE

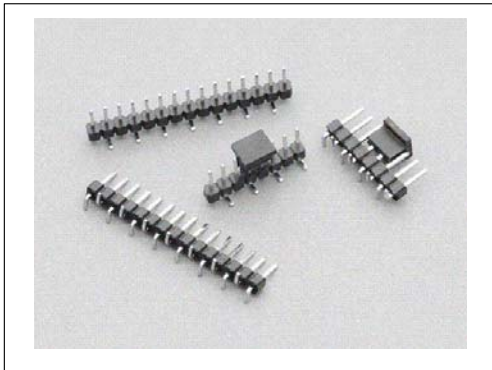

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

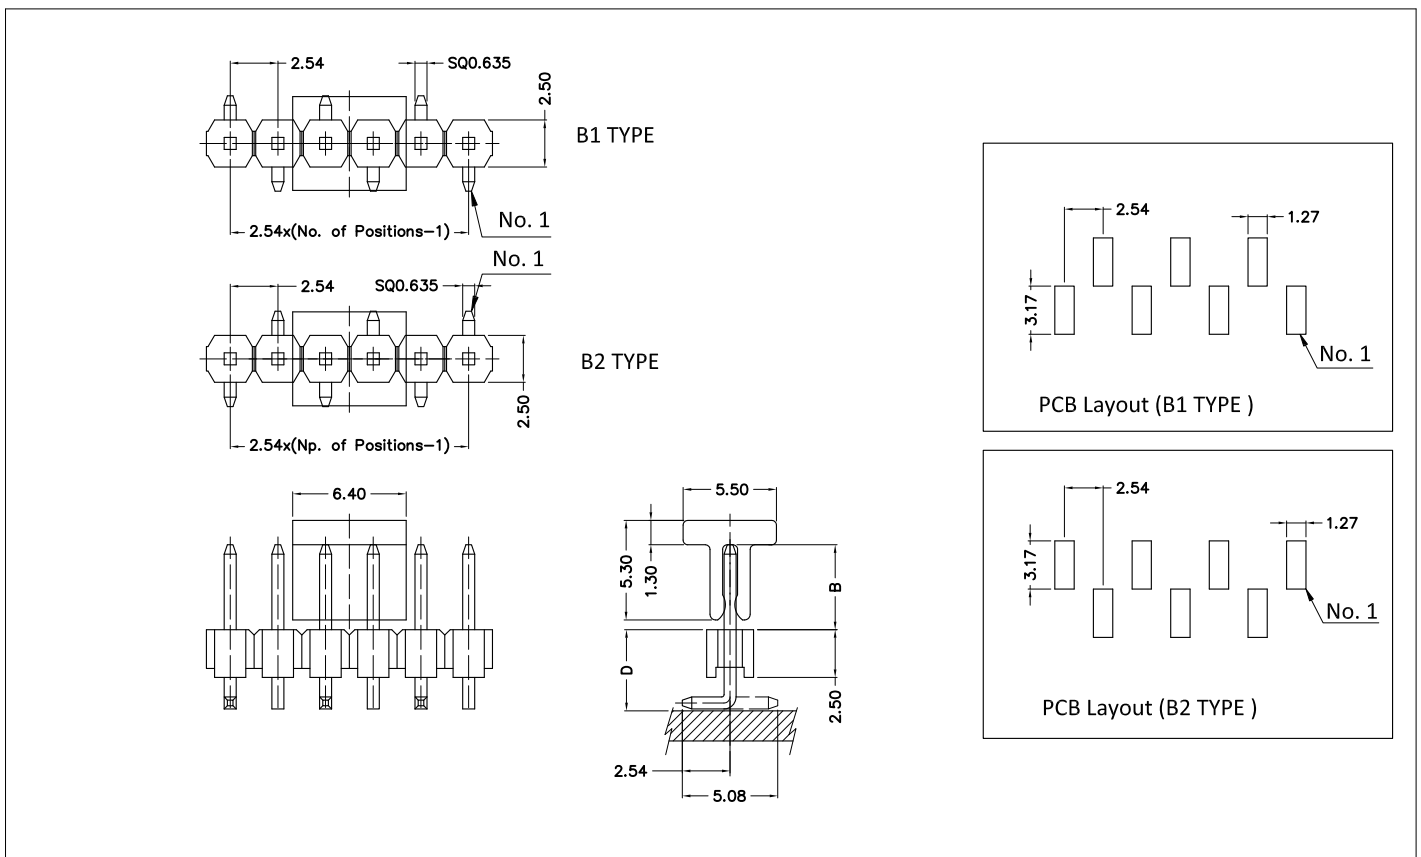

Ordering Information: E64 - XXX - XX - XX - XXX - XX - X

1 --> Series Number:	E64							
2 --> Contact Positions:	2-30PIN: 002-030,							
3 --> Layout option:	10: B1 TYPE,		11: B2 TYPE,					
4 --> Dim. "B, C, D" option:	10: B=3.05, D=3.80, C=5.08	11: B=4.80, D=3.80, C=5.08	12: B=6.10, D=3.80, C=5.08	13: B=6.90, D=3.80, C=5.08	14: B=9.90, D=3.80, C=5.08	15: B=5.84, D=3.80, C=5.08	16: B=8.13, D=3.80, C=5.08	17: B=10.67, D=3.80, C=5.08
	As request: B/C/D=XX/XX/XX,		For Eg: B=4.60, C=6.00, D=3.90,		Code=4.60/6.00/3.90,			
5 --> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated			
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated					
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated					
6 --> CAP option:	00: Without CAP,			01: With CAP,				
7 --> Packing option:	2: Tube,			3: T&R,				