




# F05


## 1.27mm Pitch Female Header Dual Row Vertical SMT TYPE ( H=2.30mm )

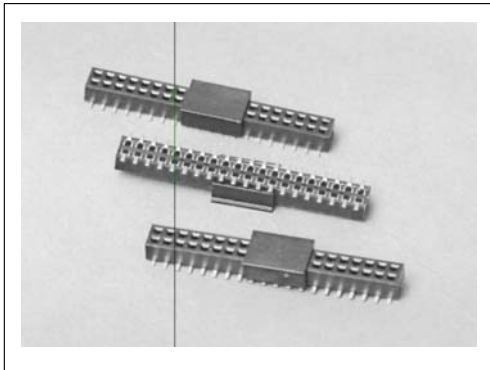

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

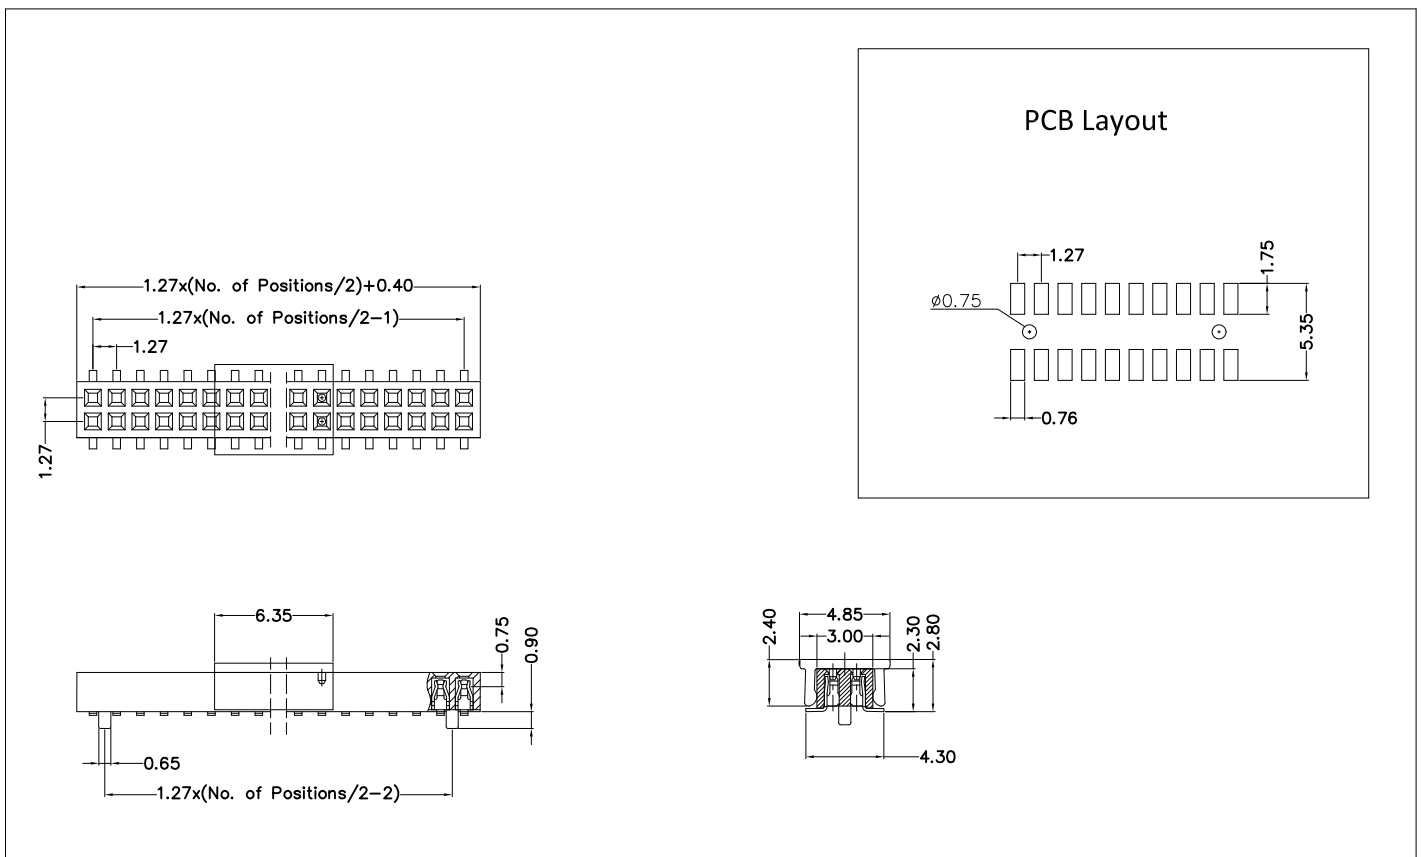

**Ordering Information:** F05 - XXX - XXX - XX - X - XX  
 1            2            3            4            5            6

1 --> Series Number:	F05		
2 --> Contact Positions:	6~80Pin: 006~080,		
3 --> Plating option:	100: Full Gold Flash Plated	500: Tin Plated	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated	630: 30U" selective Gold plated	
4 --> CAP option:	00: Without CAP,	01: With CAP,	
5 --> Packing option:	2: Tube,	3: T&R,	
6 --> Location Peg option:	00: Without Peg,	01: With Peg,	