




# F10


## 2.00mm Pitch Female Header Single & Dual & Triple & Four Row Dual Body Straight DIP TYPE

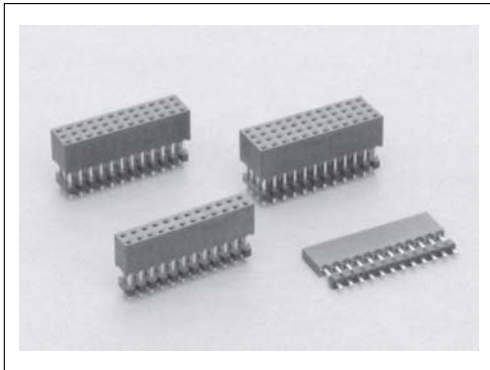

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

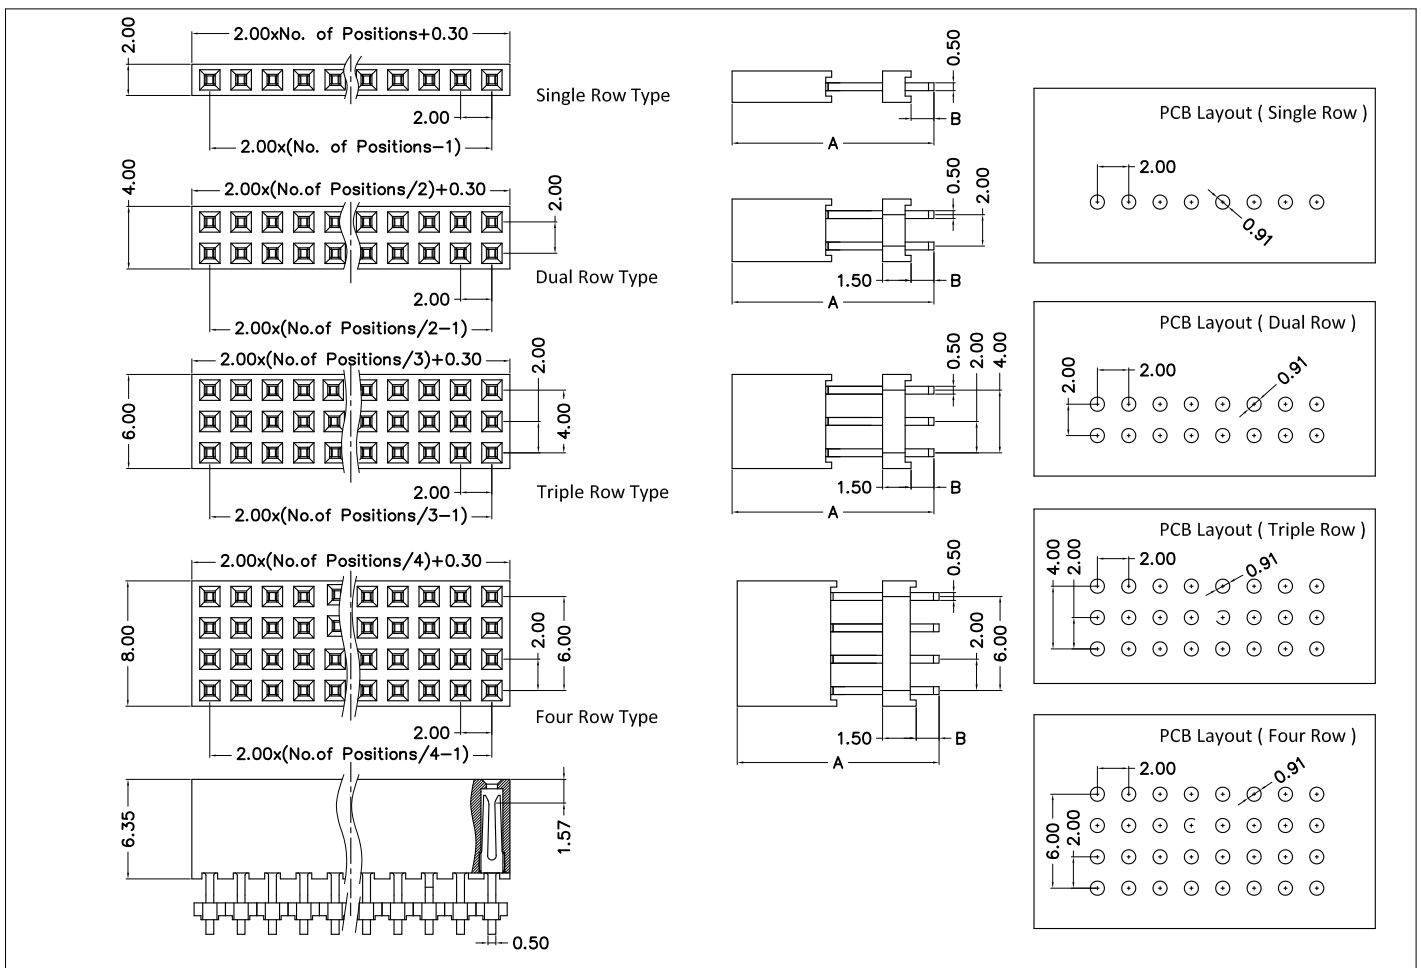

### Ordering Information: F10 - XXX - XX - XX - XXX

1 --> Series Number:	F10			
2 --> Contact Positions:	Single Row: 002~040,	Dual Row: 004~080,	Triple Row: 006~120,	Four Row: 008~160,
3 --> Contact Row:	10: Single Row Type,	20: Dual Row Type,	30: Triple Row Type,	40: Four Row Type,
4 --> Dim. " A, B " option:	10: A=9.35, B=1.27 (B Max 1.50 ),		11: A=11.63, B=1.27 (B Max 3.78 ),	
	12: A=12.34, B=1.27 (B Max 4.49 ),		13: A=21.59, B=1.27 (B Max 13.74 ),	
	As request: A/B=XX/XX, For Eg: A=11.63, B=3.00, Code: 11.63/3.00			
5--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated		
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated		