




F18


2.00mm Pitch Female Header Single & Dual Row Vertical SMT TYPE (H=3.70 & 4.30mm)

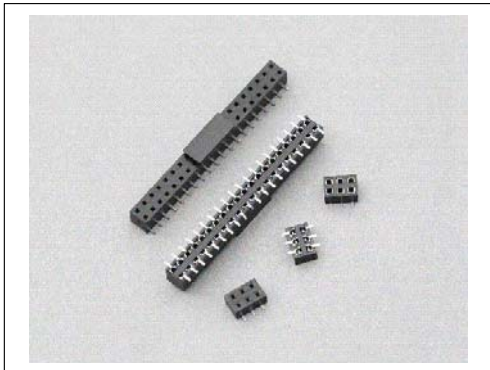

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

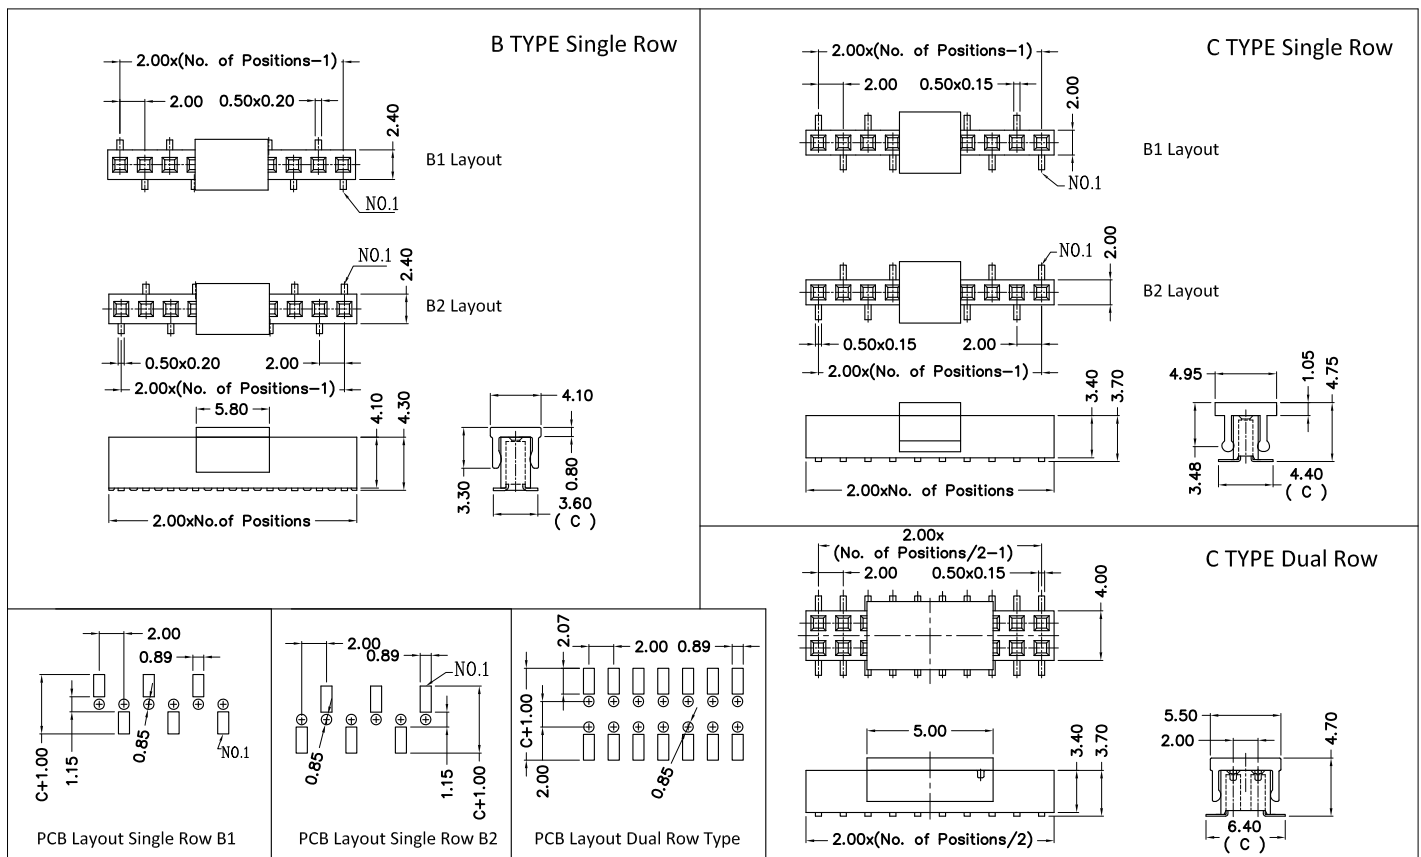

Ordering Information: F18 - XXX - XX - XXX - XX - X

1 2 3 4 5 6

1 --> Series Number:	F18
2 --> Contact Positions:	B TYPE Single Row: 004~040, C TYPE Single Row : 004~040, C TYPE Dual Row: 006~080,
3 --> Connector Type:	10: B Type B1 Layout, 11: B Type B2 Layout, 12: C Type B1 Layout, 13: C Type B2 Layout, 20: C Type Dual Row,
4--> Plating option:	100: Full Gold Flash Plated, 500: Tin Plated, 600: Selective Gold Flash Plated 610: 10U" selective Gold plated, 615: 15U" selective Gold plated 620: 20U" selective Gold plated, 630: 30U" selective Gold plated
5 --> CAP option:	00: Without CAP, 01: With CAP,
6 --> Packing option:	2: Tube, 3: T&R,