




# F22


## 2.00mm Pitch Female Header Dual Row Vertical DIP TYPE

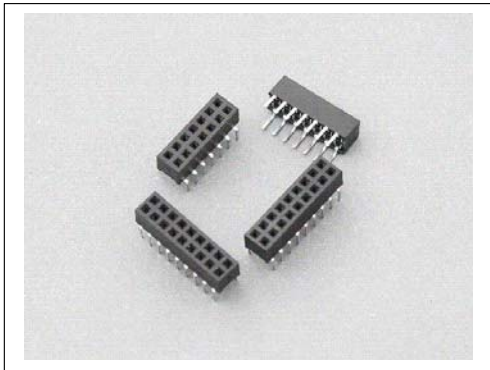

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

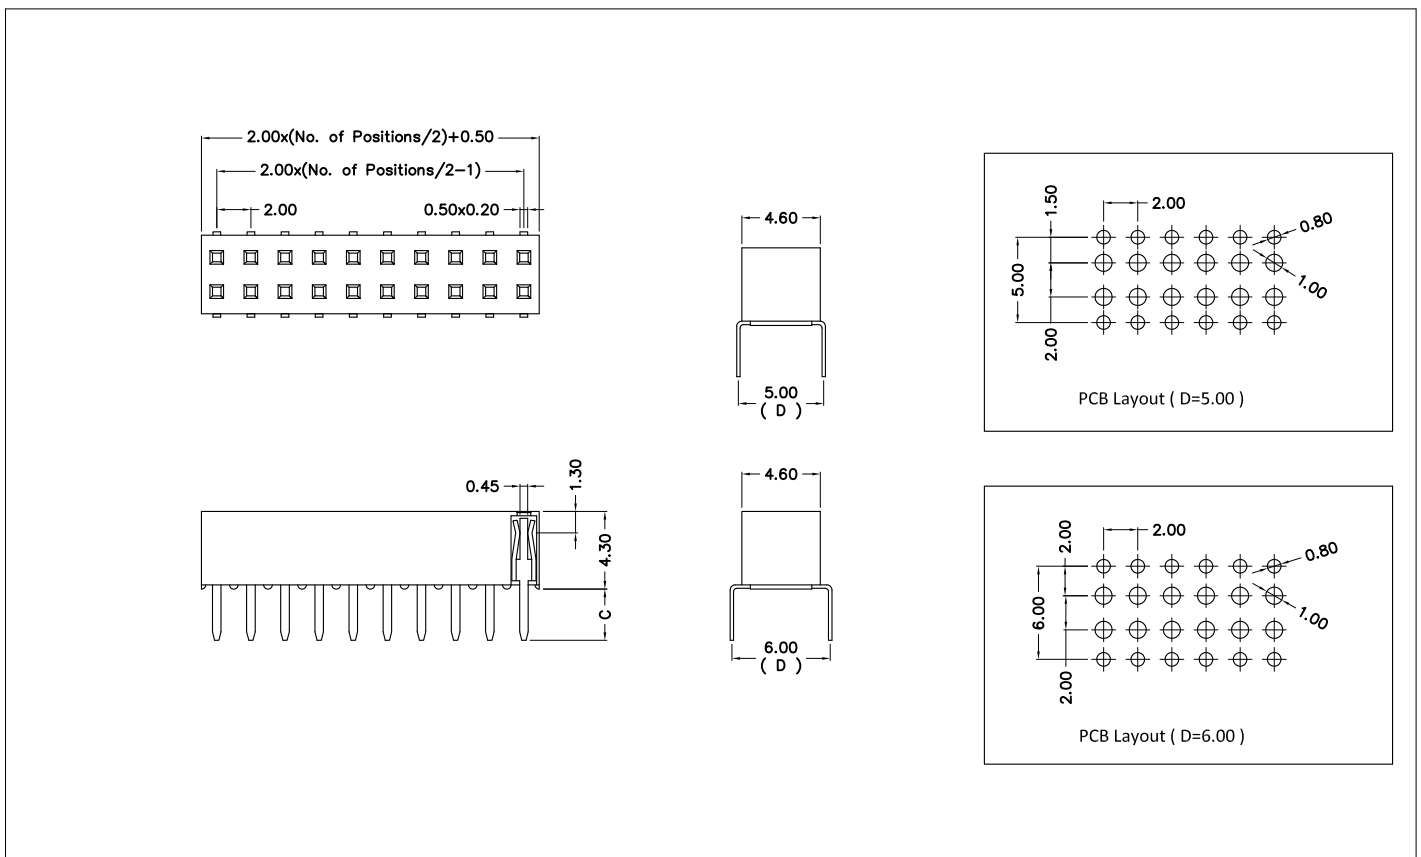

### Ordering Information: F22 - XXX - XX - XXX

1            2            3            4

1 --> Series Number:	F22		
2 --> Contact Positions:	6~80Pin: 006~080,		
3 --> Dimension " C, D " option:	10: C=3.60, D=5.00,	11: C=3.00, D=6.00,	
4--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	