F23

2.00mm Pitch Female Header Single Row
Vertical DIP TYPE (Single & Dual Side)

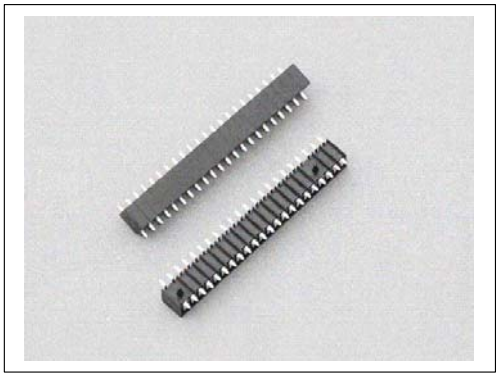

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40℃ ~ +105℃.
Max. Processing Temp.:	230℃ for 30~60 seconds.
	260℃ for 10 seconds.

RoHS Compliant

Single Side

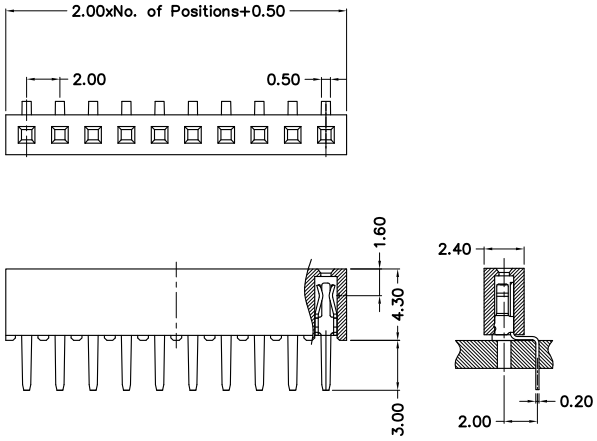

Dual Side

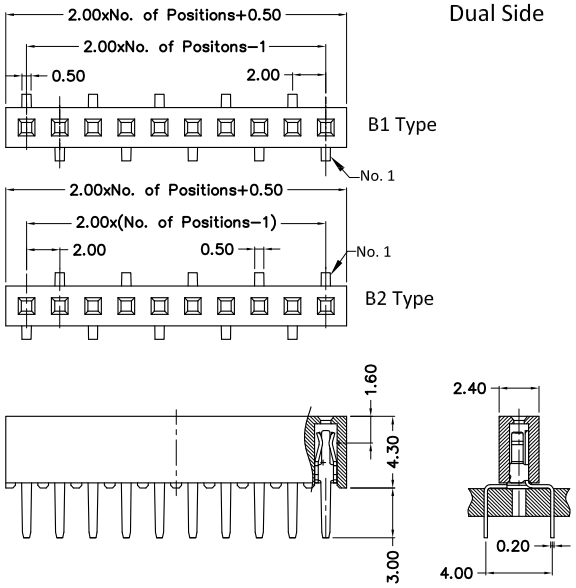

PCB Layout (Single Side)



PCB Layout (Dual Side B1 TYPE)



PCB Layout (Dual Side B2 TYPE)



Ordering Information: F23 - XXX - XX - XXX - X

1	2	3	4	5	

1 --> Series Number:	F23		
2 --> Contact Positions:	3~40Pin: 003~040,		
3 --> Connector Type:	10: Single Side Type,	11: Dual Side B1 Type,	12: Dual Side B2 Type,
4--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	
5 --> Packing option:	2: Tube,	3: T&R,	