





2.54mm Pitch Female Header Single & Dual Row Straight & Right Angle DIP TYPE

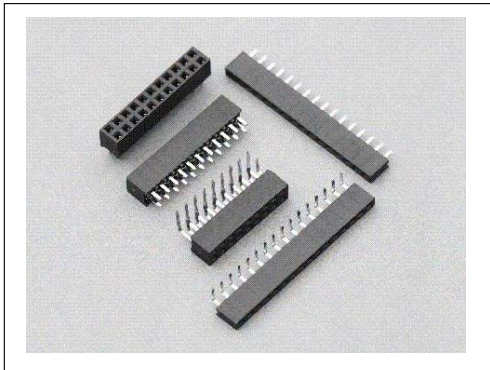

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

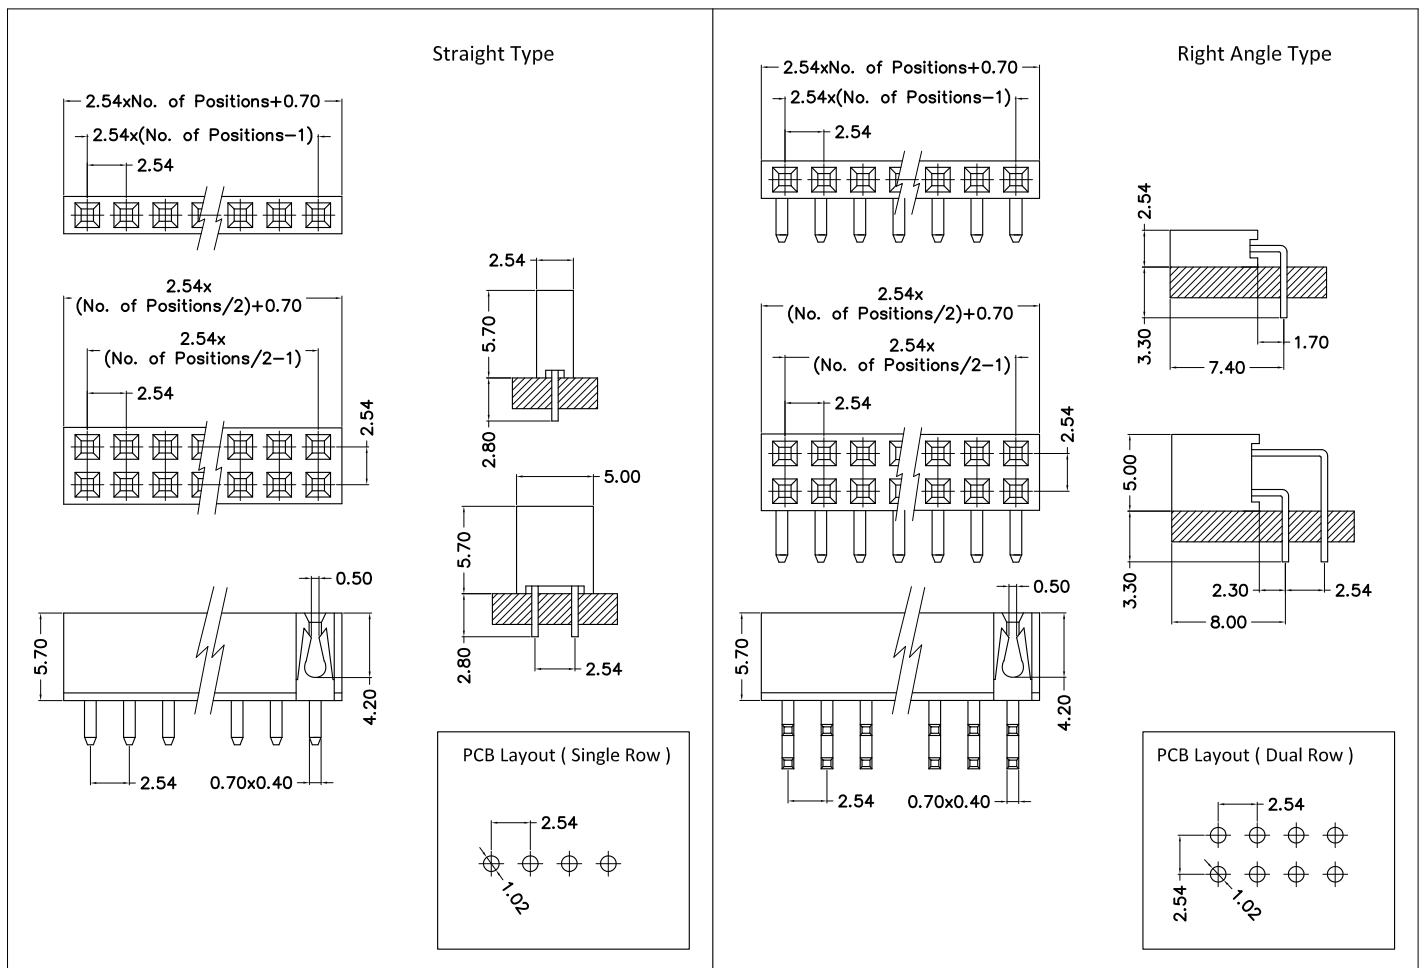

Ordering Information: F28 - XXX - XX - XXX

1 2 3 4

1 --> Series Number:	F28	
2 --> Contact Positions:	Single Row: 002~040,	Dual Row: 004~080,
3 --> Connector Type:	10: Single Row Straight Type,	11: Single Row Right Angle Type,
	20: Dual Row Straight Type,	21: Dual Row Right Angle Type,
4 --> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated, 600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated