




F31


2.54mm Pitch Female Header Dual Row Straight DIP TYPE (H=7.30mm)

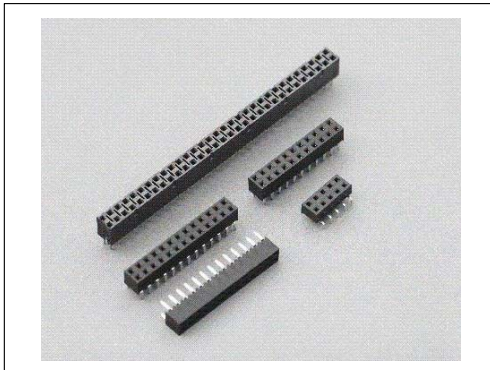

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

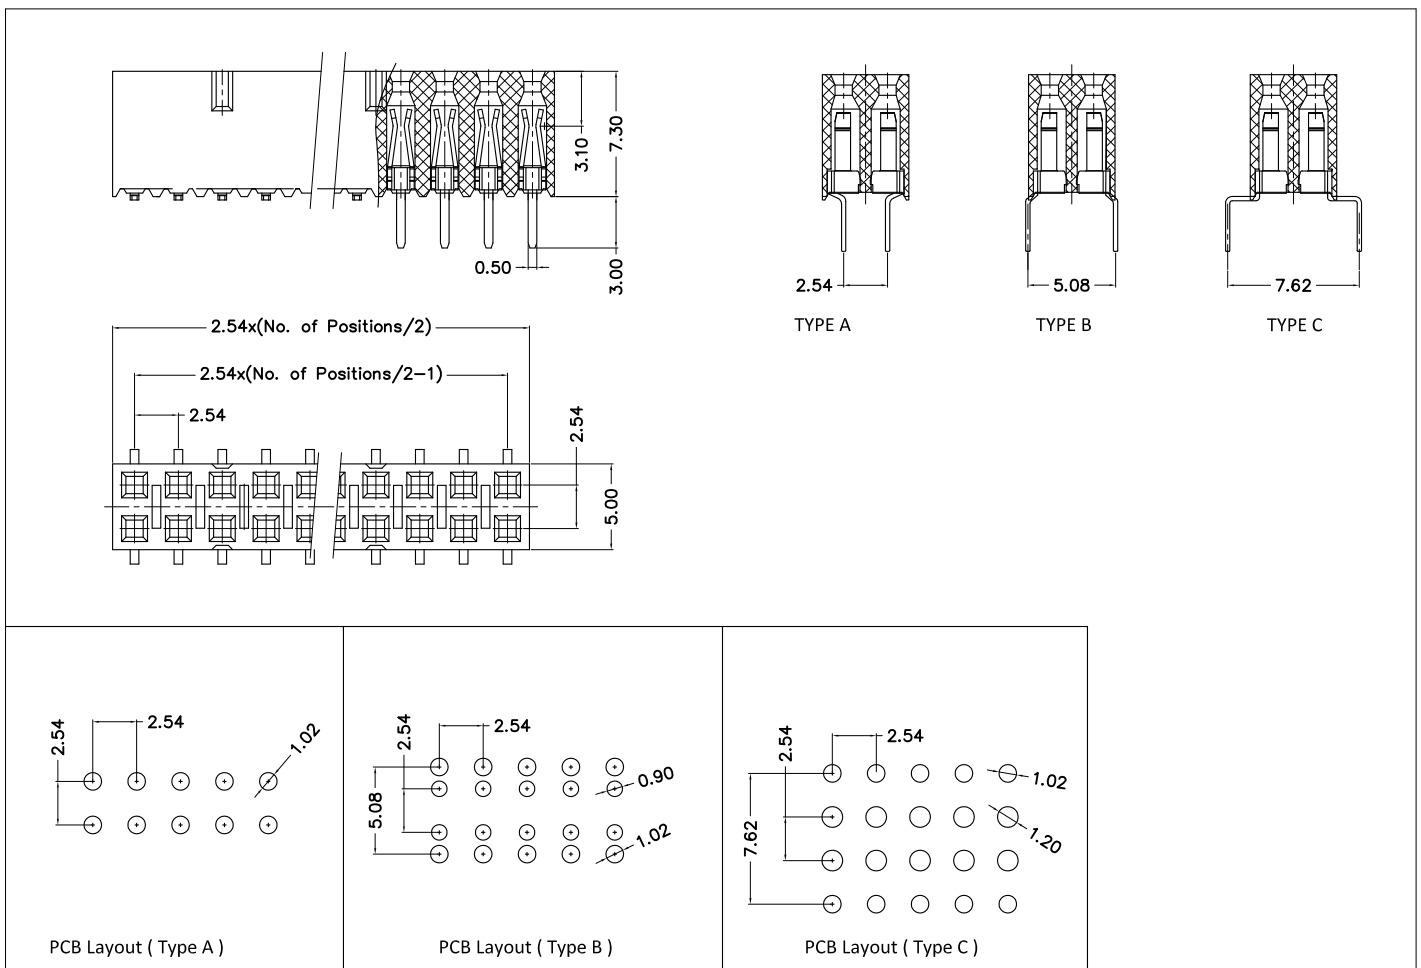

Ordering Information: F31 - XXX - XX - XXX

1 2 3 4

1 --> Series Number:	F31		
2 --> Contact Positions:	4~80Pin: 004~080,		
3 --> Connector Type:	30: H=7.30 TYPE A,	31: H=7.30 TYPE B,	32: H=7.30 TYPE C,
4--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	