




1.00mm Pitch Pin Header Single & Dual Row Single Body Vertical SMT TYPE (Dual Row: 1.00*1.00mm)



Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.30x0.30mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

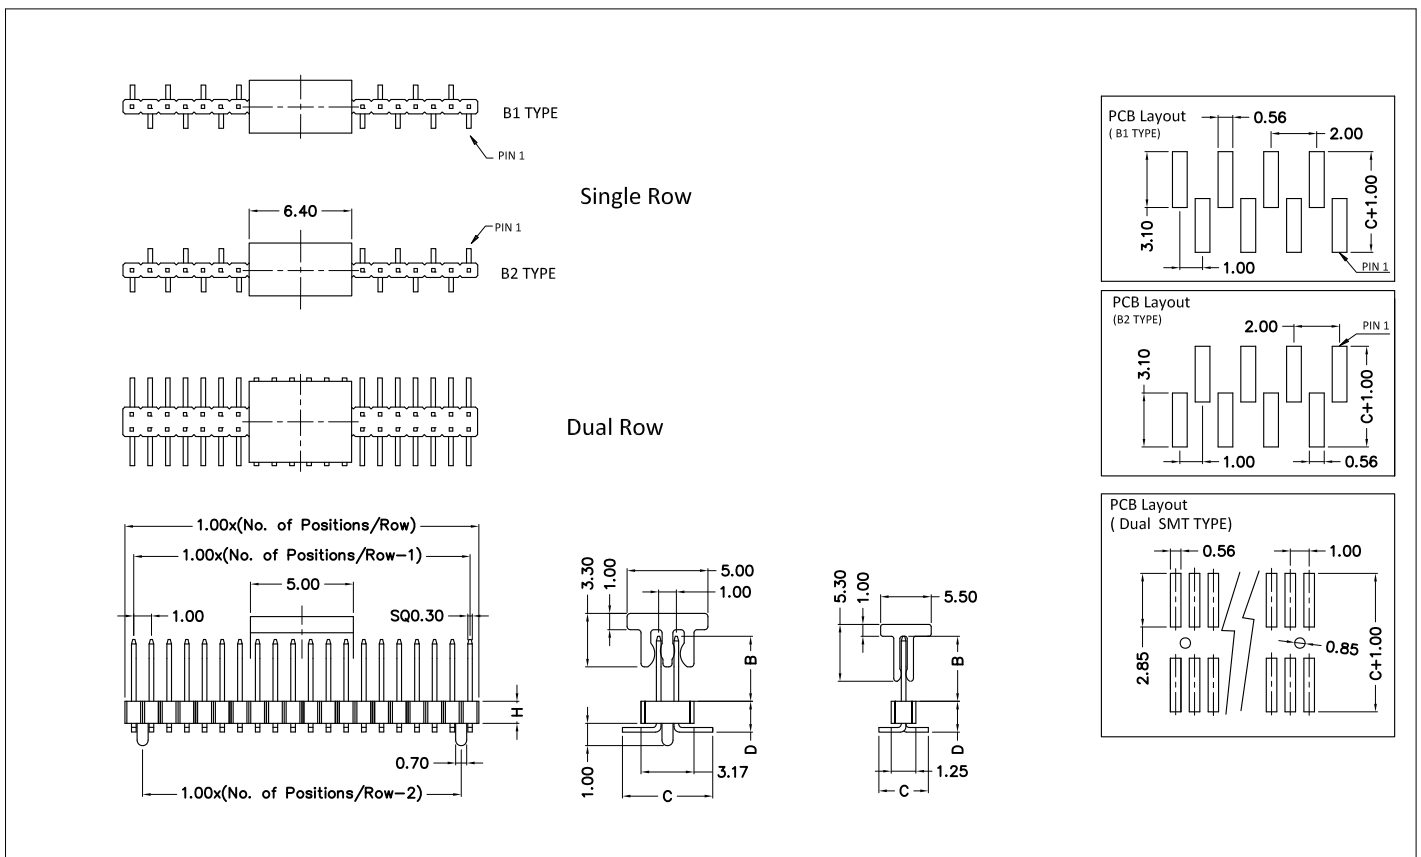

Ordering Information: E03 - XXX - XX - XX - XX/XX/XX - XXX - XX - X - XX

1 --> Series Number:	E03		
2 --> Contact Positions:	01-100PIN: 01-100,		
3 --> Layout option:	10: Single Row B1 Type,	11: Single Row B2 Type,	20: Dual Row Type,
4 --> Dim. " H " option:	10: H=1.00,	11: H=1.50,	
5 --> Dim. " B, C, D " option:	As request: B/C/D, XX/XX/XX,	For Eg: B=7.00, C=7.80, D=6.50,	Code=7.00/7.80/6.50,
6--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	
7--> CAP option:	00: Without CAP,	01: With CAP,	
8 --> Packing option:	1: Tray,	2: Tube,	3: T&R,
9 --> Location Peg option: (For Dual Row only)	00: Without Peg,	01: With Peg,	