




E22


1.27mm Pitch Pin Header Single & Dual Row Dual Body Right Angle DIP TYPE (Dual Row: 1.27*1.27mm)

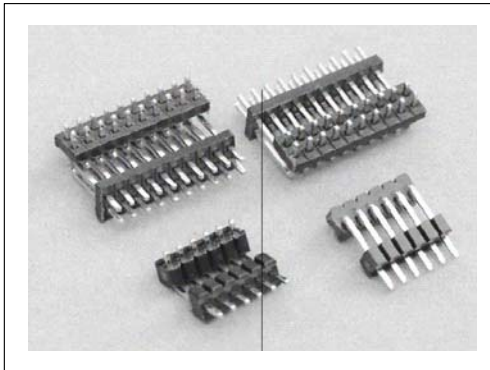

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

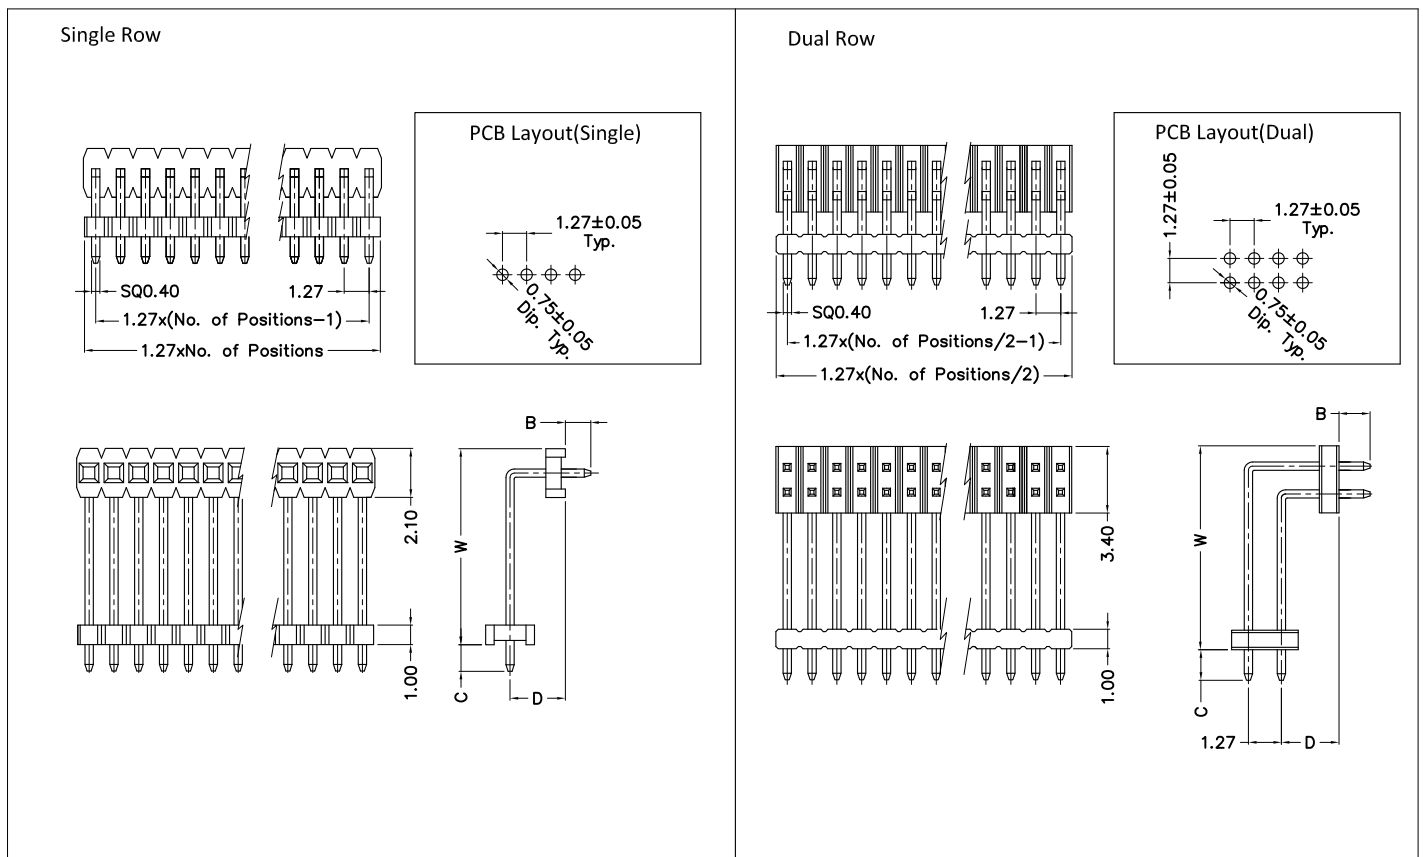

Ordering Information: E22 - XXX - XX - XX - XXX

1
2
3
4
5

1 --> Series Number:	E22	
2 --> Contact Positions:	Single Row: 002~050, Dual Row: 004~100,	
3 --> Contact Row:	10: Single Row, 20: Dual Row,	
4 --> Dimension option:	10: B=3.10, C=3.30, D=3.80, W=7.00, 11: B=3.10, C=3.30, D=3.80, W=8.50, As Request: B/C/D/W=XX/XX/XX/XX, For Eg: B=4.15, C=3.20, D=5.00, W=6.20, Code=4.15/3.20/5.00/6.20,	
5 --> Plating option:	100: Full Gold Flash Plated 500: Tin Plated 600: Selective Gold Flash Plated 610: 10U" selective Gold plated 615: 15U" selective Gold plated 620: 20U" selective Gold plated 630: 30U" selective Gold plated	