




E31


1.27mm Pitch Box Header Dual Row Single Body Vertical SMT TYPE (1.27*1.27mm)

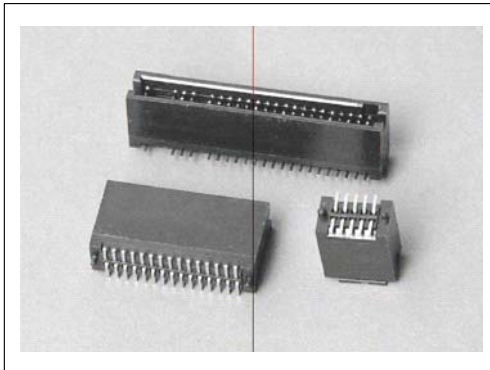

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.40x0.40mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

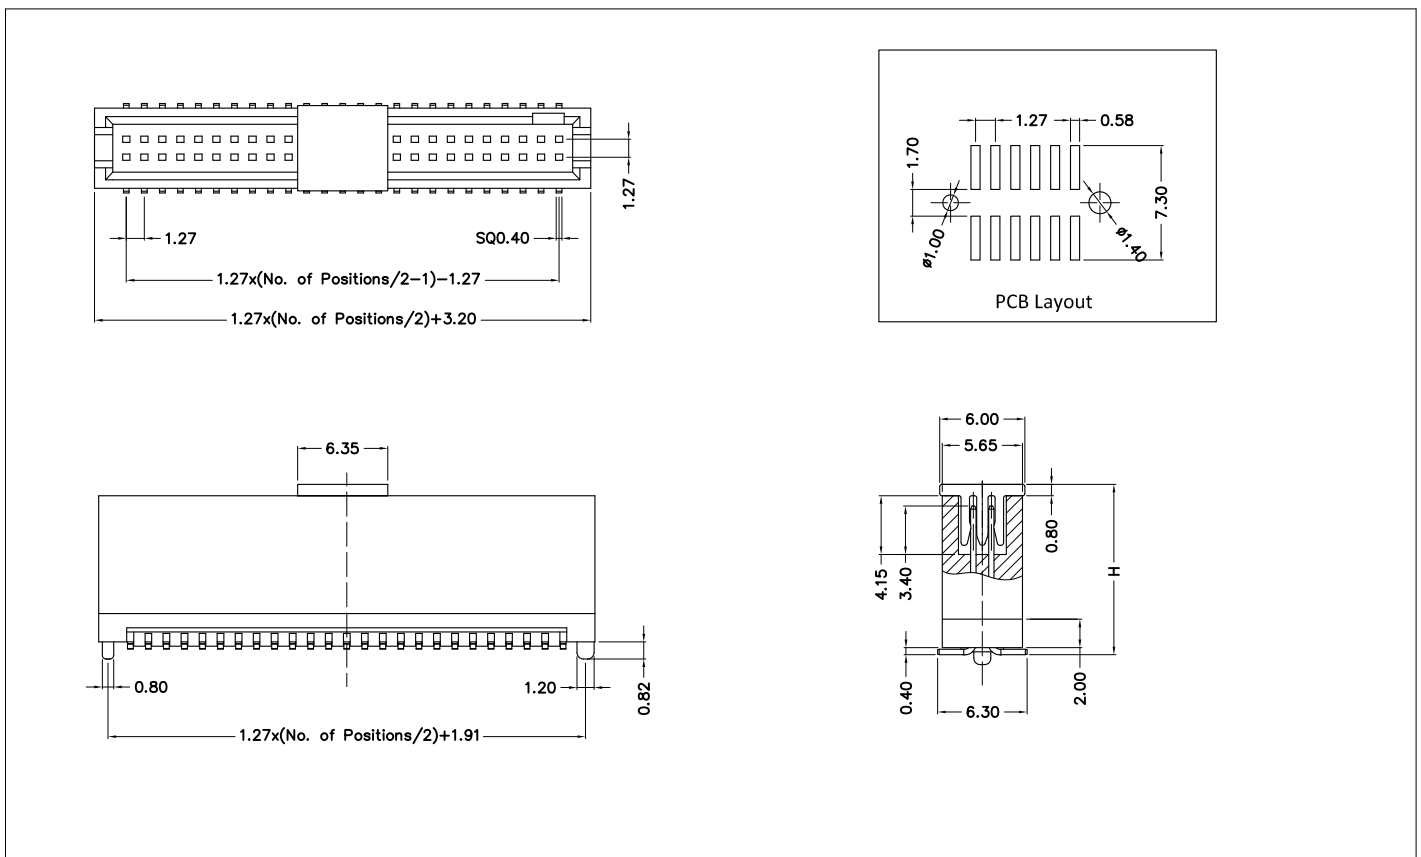

Ordering Information: E31 - XXX - XX - XXX - XX - X

	1	2	3	4	5	6
1 --> Series Number:	E31					
2 --> Contact Positions:	10~100Pin: 010~100,					
3 --> Profile option:	10: H=7.30,	11: H=9.50,	12: H=9.90,	13: H=10.10,	14: H=11.20,	15: H=11.50
	16: H=11.70,	17: H=12.00,	18: H=12.70,	19: H=14.60,	20: H=15.70,	21: H=16.10
	22: H=5.75,	23: H=6.10,	24: H=10.90,	25: H=17.80,		
4--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,		600: Selective Gold Flash Plated	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated			
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated			
5 --> CAP option:	00: Without CAP,			01: With CAP,		
6 --> Packing option:	2: Tube,			3: T&R,		