





## 2.00mm Pitch Female Header Single & Dual Row Dual Body Right Angle DIP TYPE

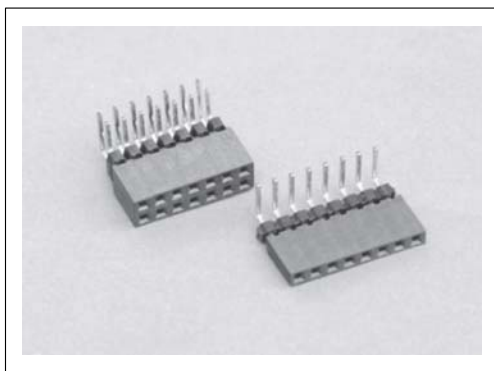

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

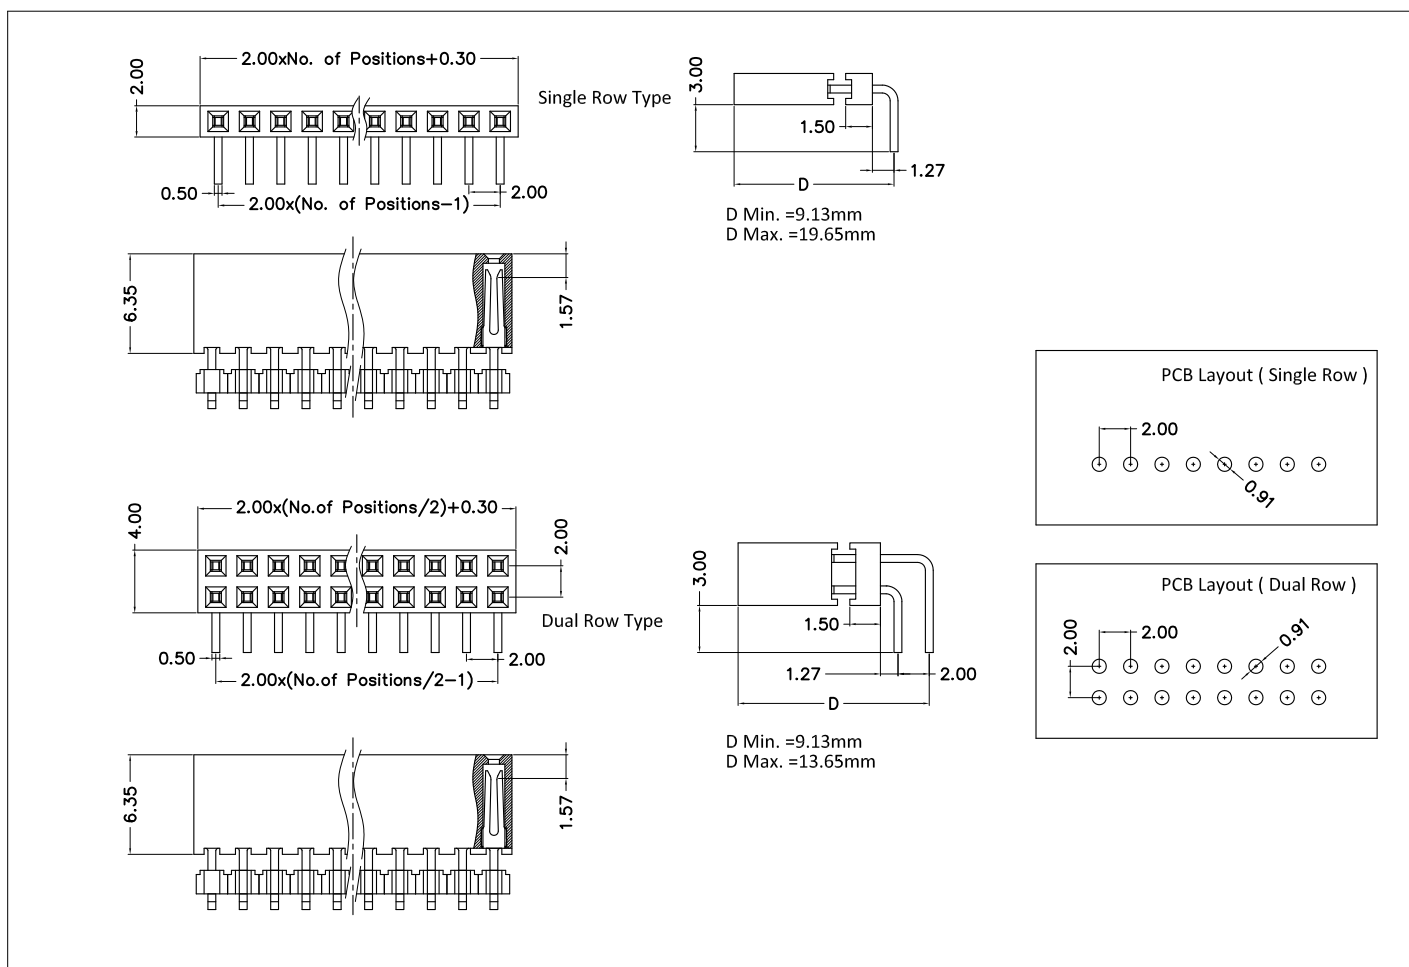

### Ordering Information: F11 - XXX - XX - XX - XXX

1      2      3      4      5

1 --> Series Number:	F11		
2 --> Contact Positions:	Single Row: 002~040,	Dual Row: 004~080,	
3 --> Contact Row:	10: Single Row Type,	20: Dual Row Type,	
4 --> Dim. " D " option:	As request D=XX,	For Eg: D=9.13,	Code:=9.13,
5--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	