




F14


2.00mm Pitch Female Header Single & Dual Row Right Angle & Straight DIP TYPE

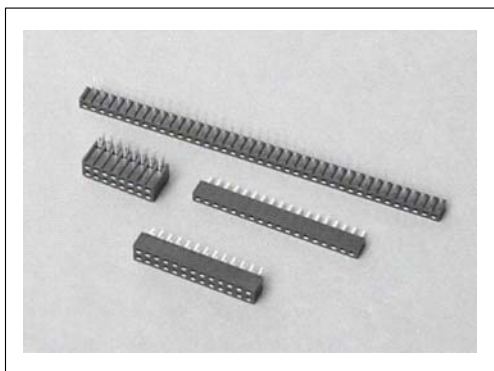

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

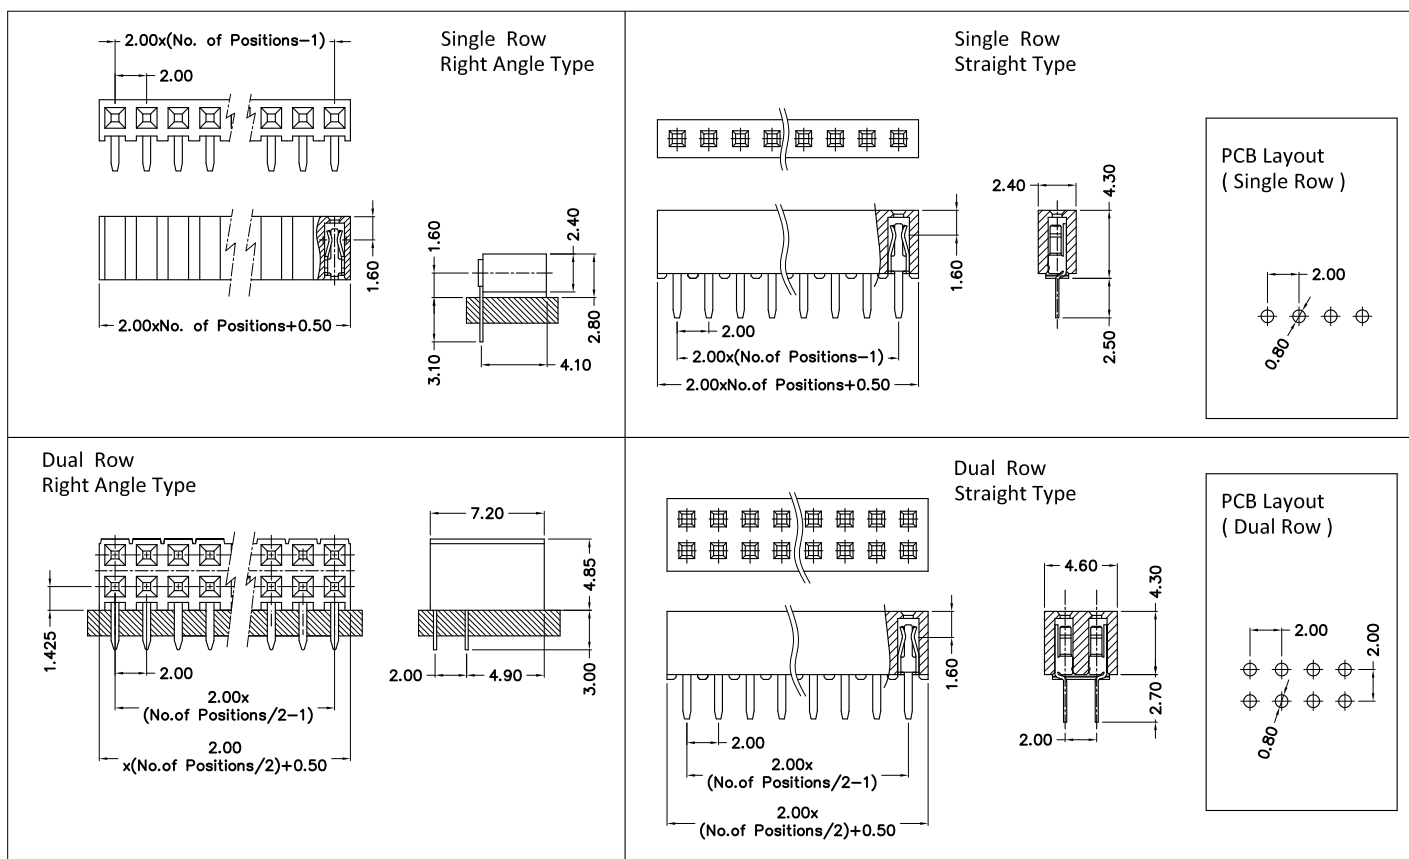

Ordering Information: F14 - XXX - XX - XXX

1 2 3 4

1 --> Series Number:	F14		
2 --> Contact Positions:	Single Row: 003~040,	Dual Row: 004~080,	
3 --> Connector Type:	10: Single Straight Type,	11: Single Right Angle Type,	20: Dual Straight Type, 21: Dual Right Angle Type,
4--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated,	600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated	