





2.00mm Pitch Female Header Single & Dual Row Right Angle & Straight DIP TYPE (Profile Option)

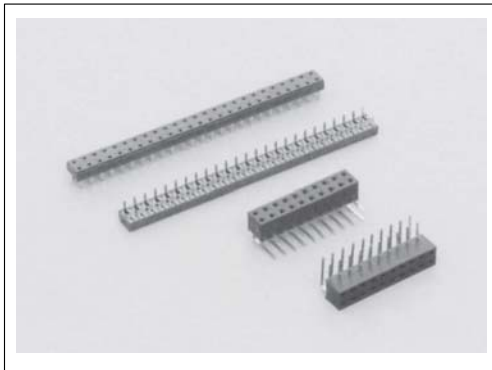

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

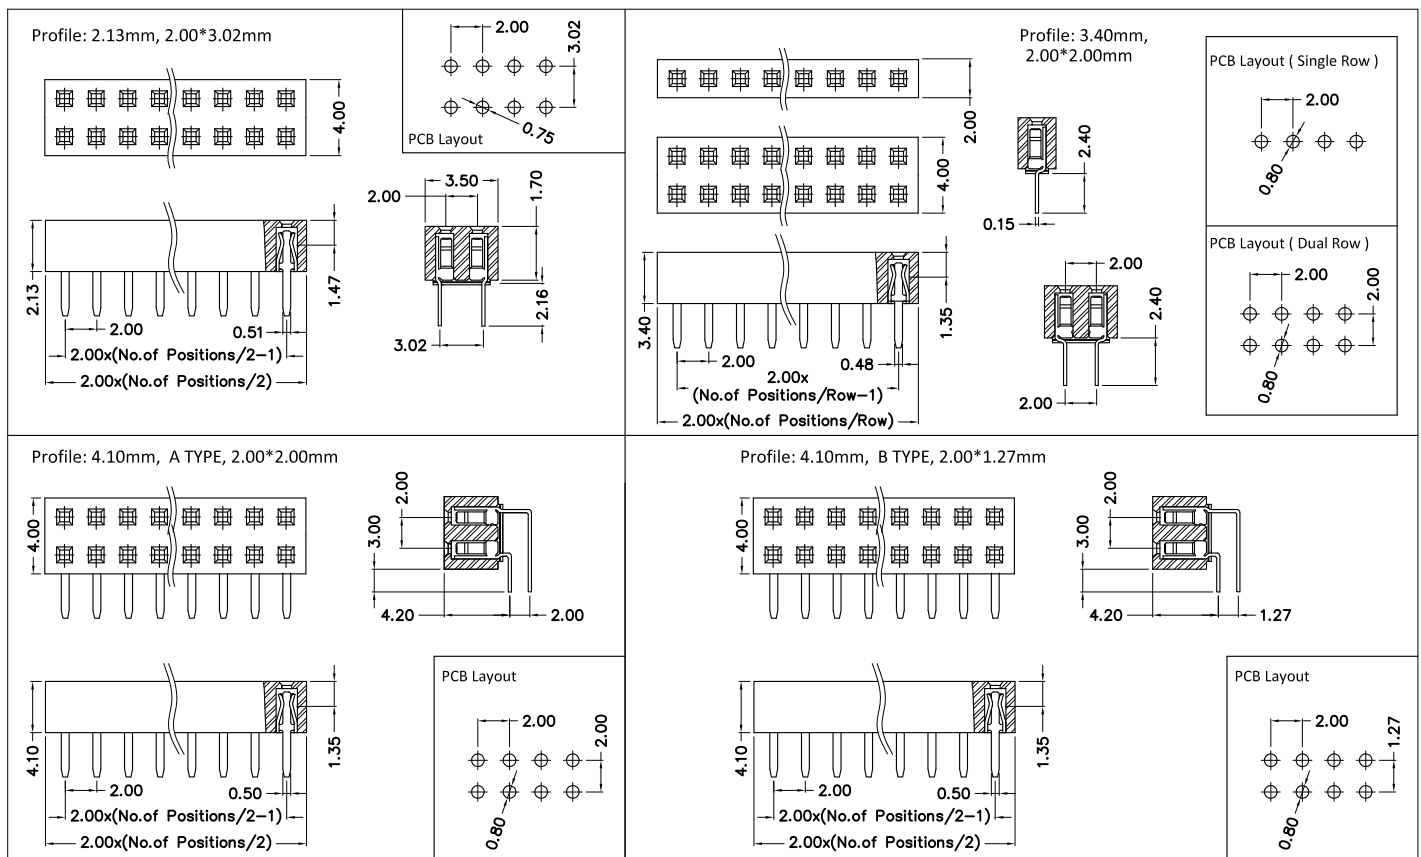

Ordering Information: F15 - XXX - XX - XXX

1 2 3 4

1 --> Series Number:	F15	
2 --> Contact Positions:	Profile 2.13 Dual Row: 004~080,	Profile 3,40 Single Row: 003~040,
	Profile 3.40 Dual Row: 006~080,	Profile 4.10 Dual Row: 004~080,
3 --> Profile option:	10: Profile=2.13mm Single Row Type,	11: Profile=3.40mm Single Row Type, 21: Profile=3.40mm Dual Row Type,
	30: Profile=4.10mm Dual Row A Type,	31: Profile=4.10mm Dual Row B Type,
4--> Plating option:	100: Full Gold Flash Plated,	500: Tin Plated, 600: Selective Gold Flash Plated
	610: 10U" selective Gold plated,	615: 15U" selective Gold plated
	620: 20U" selective Gold plated,	630: 30U" selective Gold plated
	selective Gold Flash plated only for Profile 3.40 & Profile 4.10mm,	